

euro-wall.com | 888.989.EURO













Comfortable & Captivating






Looking to add the perfect blend of beauty and performance to your space? Vista Fold™ thermally broken impact and non-impact folding door systems are the clear choice. Now you can have unobstructed views and seamless transitions to the outside with increased energy efficiency. Engineered with precision, these doors feature a thermal barrier that effectively reduces heat and cold transfer, maintaining comfortable indoor temperatures while minimizing energy consumption. Our innovative folding components optimize your space, bringing the outdoors in. With sleek aluminum frames that provide strength and durability, these doors are a testament to modern design and sustainable living.

At Euro-Wall, everything we do is Superior by Design. We constantly push ourselves to provide the highest quality doors with the largest views to give you the freedom to design without limitations.



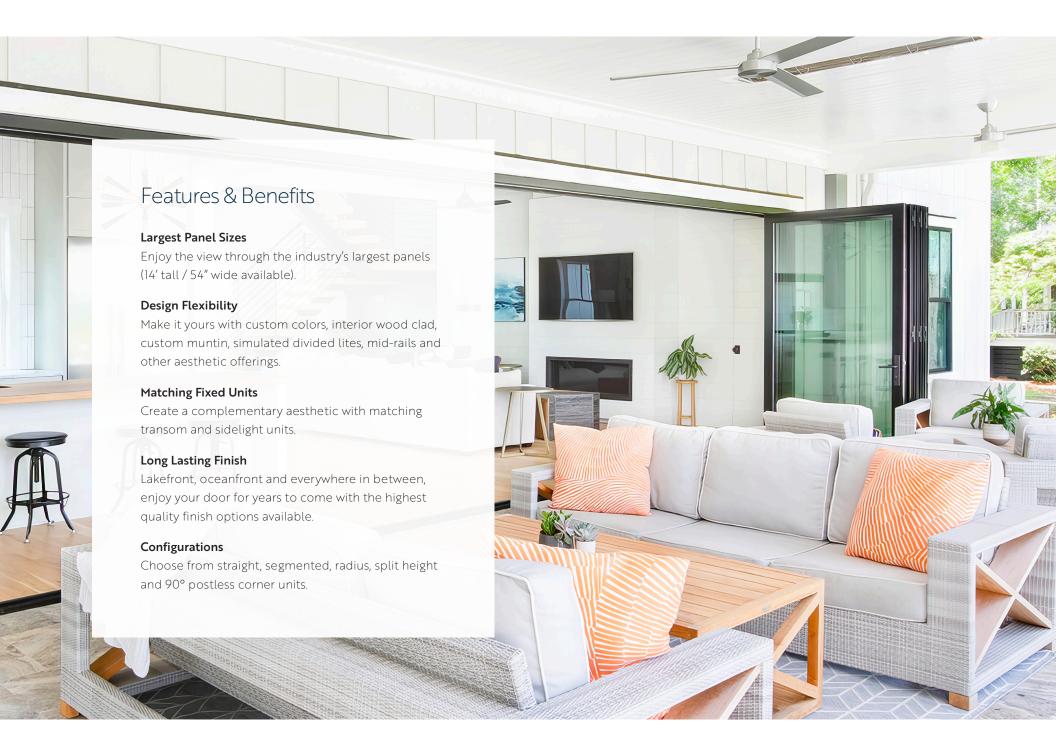

System Thresholds

MAXIMUM / MINIMUM SPECIFICATIONS

MAX. PANEL WEIGHT
MAX. PANEL HEIGHT
MAX. PANEL WIDTH
MIN. PANEL HEIGHT
MIN. PANEL WIDTH
MAX. OPENING

IMPACT RATED	NON-IMPACT RATED
350 lbs	350 lbs
144"	169"
54"	54"
20"	20"
20"	20"
334 SQ. FT	UNLIMITED

Note: When using maximum panel widths & heights, panels may exceed maximum panel weight of 350 lbs. Calculated weight check should be done. For installations in Florida, please see the Florida Product Approval (#27023) for usage and limitations.



10-Year Limited Warranty

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years.










Sill Options



STANDARD SILL

Water-Rated (out-swing only), Impact-Rated | E0023




RAMPED SILL

Impact-Rated | E0026



MODIFIED STANDARD SILL

Impact-Rated | E0110



CHANNEL SILL

Interior Application Only | E0108

Finish Options

STANDARD FRAME & DOOR PANEL FINISHES









UC40577

Sunstorm Arcadia Silver UC70123F

Bronze UC91252

Black UC40577

Clear Anodized

Standard finish is Kynar AAMA 2605.

FRAME & DOOR PANEL FINISHES

- · Kynar® Liquid Paint or Powder Coat finishes available
- · Custom powder coat or Kynar® finishes available
- · Custom faux woodgrain finishes available

INTERIOR WOOD CLAD FINISH OPTION

- Mahogany / sapele
- · White oak
- · Additional wood species available



Hardware / Handle Finish Options

Custom handle options available

MULTIPOINT LOCK HANDLE



Polished Stainless Steel Brushed Satin Bronze Black

TWINPOINT LEVER



Sunstorm Arcadia Silver White Brushed Satin Bronze Black Custom Colors Available

HINGES / HARDWARE




White Brushed Satin Black / Dark Bronze

Note: The colors shown are an approximation of actual colors and finishes. Actual finishes may vary slightly.






Standard Configurations

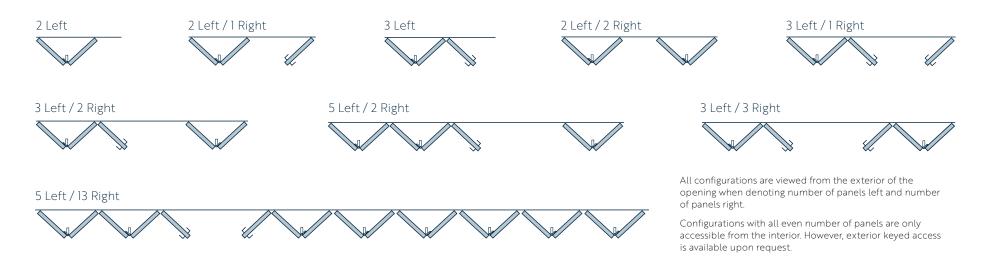

Specialty Configurations

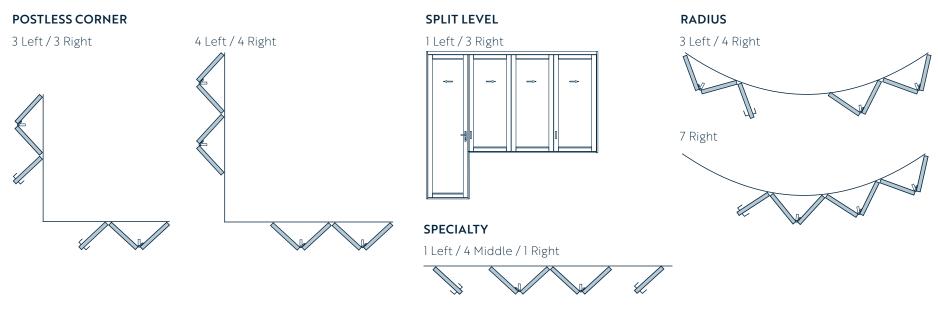



Double Egress Capabilities

Flexible daily door access.

Multi-Directional Movement

Unmatched flexibility.

Effortless Operation

Smooth-glide precision.

Enhanced Security


Engineered peace of mind.

Freedom to Move, Power to Perform.

Take your design freedom to the next level with Euro-Wall's Multidirectional Folding Doors—an advanced evolution of our proven aluminum folding door system. This innovative update allows pairs of panels to fold and slide in any direction creating truly flexible configuration options and egress points for opening transitions.


*Double egress condition shown


1 Left | 2 Middle | 1 Right



4 Left / Middle | 1 Right













Panel Cross Section

OUTSWING CONFIGURATION SHOWN

Standard Sill Shown Header: E0032

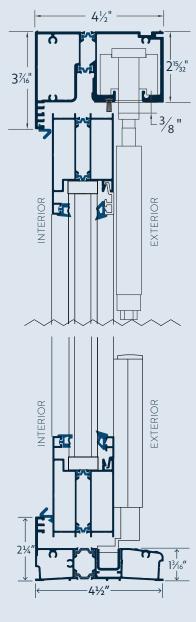

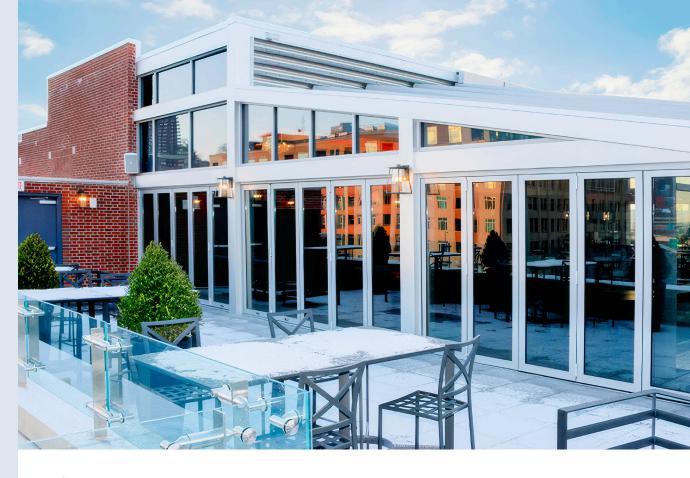

Glazing Details


OVERALL GLASS THICKNESS 1/4" | 3/8" | 1/2" | 9/16" | 1"

E0024

We can handle most any type of glass if it meets the required thickness. Let's talk.

9/16" LAMINATED GLASS PROFILE SHOWN


Stile Recessed: E0022 Active (not shown): E0025



Top Bottom Rail

1" INSULATED GLASS PROFILE SHOWN

Stile Recessed: E0022 Active (not shown): E0025



Top Bottom Rail E0024

DESIGN PRESSURE CHARTS

HVHZ & Wind Zone 3

Panel Width

		26	30	34	36	38	39	42	45	46	48	50	54
	72	50	50	50	50	50	50	50	50	50	50	50	50
	78	50	50	50	50	50	50	50	50	50	50	50	50
	84	50	50	50	50	50	50	50	50	50	50	50	50
	90	50	50	50	50	50	50	50	50	50	50	50	50
	91	50	50	50	50	50	50	50	50	50	50	50	50
	96	50	50	50	50	50	50	50	50	50	50	50	50
	97	50	50	50	50	50	50	50	50	50	50		
	102	50	50	50	50	50	50	50	50	50	50		
Panel Height	103	50	50	50	50	50	50	50	50	50	50		
ė.	108	50	50	50	50	50	50	50	50	50	50		
늘	109	50	50	50	50	50	50	50	50				
aue	114	50	50	50	50	50	50	50	50				
Δ.	115	50	50	50	50	50	50	50					
	120	50	50	50	50	50	50	50					
	121	50	50	50	50	50	50						
	126	50	50	50	50	50	50						
	127	50	50	50	50	50	50						
	132	50	50	50	50	50	50						
	133	50	50	50	50								
	138	50	50	50	50								
	139	50	50	50	50								
	144	50	50	50	50								

Non-Impact

Panel Height

Panel Width

	26	30	34	36	38	39	42	45	46	48	50	54
72	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
78	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
84	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
90	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
91	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
96	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
97	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
102	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
103	50	50	50	50	50	50	50	45.7	45.7	42	42	38.9
108	50	50	50	50	50	50	50	45.7	45.7	42	42	
109	50	50	50	50	50	50	50	45.7	45.7	42	42	
114	50	50	50	50	50	50	50	45.7	45.7			
115	50	50	50	50	50	50	50	45.7	45.7			
120	50	50	50	47	47	42.9	42.9	39.5	39.5			
121	50	50	50	47	47	42.9	42.9	39.5	39.5			
126	50	50	44.9	40.5	40.5	36.9	36.9					
127	50	50	44.9	40.5	40.5	36.9	36.9					
132	50	43.9	39	35.1	35.1	32	32					
133	50	43.9	39	35.1	35.1	32	32					
138	44.1	38.4	34.1	30.7	30.7							
139	44.1	38.4	34.1	30.7	30.7							
144	38.8	33.8	30	27	27							
145	38.8	33.8	30	27	27							
151	34.3	29.9	26.5									
157	30.5	26.6	23.5									
163	27.3	23.7	21									
169	24.4	21.2	18.8									



Test Performance

IMPACT

Air Infiltration: ASTM E283-04 Water Infiltration: ASTM E331-00

Wind Load: TAS 202-94

Large Missile Impact: TAS 201-94

Cyclic Load: TAS 203-94 Forced Entry: AAMA 1304-18

NON-IMPACT

Air Infiltration: ASTM E283-04

Structural Performance: ASTM E330-02

Water Infiltration: ASTM E547-00 Forced Entry: AAMA 1304-02









#27023









euro-wall.com

f h X ⊙ P in



MANUFACTURING & SHOWROOM

2200 Murphy Ct. North Port, FL 34289 888.989.EURO (3876)

SHOWROOM

1211 Stirling Rd., Unit 102, Dania Beach, FL 33004 941.979.5316 EURO-WALL UNLOCKS breathtaking perspectives
THROUGH THE largest, strongest DOOR SYSTEMS
WITH THE MOST DESIGN OPTIONS – ALL BACKED
BY enjoyable, personal SUPPORT – FOR A superior
experience FROM OPEN TO CLOSE.

vision BLOCKED?

If you have questions about

Vista Fold™, our FOR YOU

Crew™ is always ready to

clear things up with friendly,

one-on-one support.







