EURO-WALL, LLC

VISTA DIRECT SET (NON-HVHZ) (NON-IMPACT)

INSTALLATION NOTES:

- 1. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS OTHERWISE STATED.
- 2. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
- 3. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/4 INCH OF THE DEPICTED LOCATION IN THE ANCHOR LAYOUT DETAIL (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- 4. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- 5. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- 6. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- 7. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE **FOLLOWING PROPERTIES:**
 - A. STEEL MIN. TENSILE YIELD STRENGTH OF 33 KSI. MIN. 18 GAUGE THICKNESS (0.0478").
- B. WOOD MINIMUM SPECIFIC GRAVITY = 0.55.
- C. ALUMINUM MIN. 6063-T5, MIN 1/8" WALL THICKNESS.
- D. CONCRETE MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.
- E. GROUT FILLED CMU- UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 2000 PSI.

GENERAL NOTES:

- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION OF THE FLORIDA BUILDING CODE, EXCLUDING HVHZ, AND HAS BEEN EVALUATED TO THE FOLLOWING:
 - ASTM E283-19
 - ASTM E330-14(21)
 - ASTM E331-00(16)
 - TAS 202-94
 - AAMA 501-15
- 2. ADEQUACY OF THE EXISTING STRUCTURAL 2X WOOD FRAMING OR METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN. A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.
- 5. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED TO PROTECT THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
- 6. GLASS SHALL MEET THE REQUIREMENTS OF ASTM E1300. SEE **GLAZING DETAILS ON SHEETS 2.**
- 7. WINDOW FRAME MATERIAL: 6063-T5 ALUMINUM
- 8. DESIGNATION "X" AND "O" STAND FOR THE FOLLOWING X: OPERABLE PANEL
- O: FIXED PANEL

	TABLE OF CONTENTS					
SHEET	SHEET DESCRIPTION					
1	INSTALLATION & GENERAL NOTES					
2	GLAZING DETAILS					
3	ELEVATION & DP TABLE SINGLE UNIT					
4	ELEVATION & DP TABLE MULLED UNIT					
5	ANCHOR LAYOUTS					
6	VERTICAL SECTIONS					
7	HORIZONTAL SECTIONS					
8	INSTALLATION DETAILS & ANCHOR SCHEDULE					

DESIGN PRESSURE TABLE							
CONFIGU	WATER TEST PRESSURE	IMPACT RATED					
SINGLE UNIT	SEE SHEET 3	10.5 PSF	NON-IMPACT				
MULLED UNIT	SEE SHEET 4	10.5 PSF	RATED				



FURO-WALL LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876

(NON-HVHZ) (NON-IMPACT)

DIRECT

REMARKS

3UILDING DROPS, II 1900 NE MIAMI COURT, SUITE 2-MIAMI, FL 33132 PH: (954)399-8478 FAX: (954)744.4738 INSTALLATIONS & GENERAL

BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENER FROM THE REQUIREMENTS DETAILED HEREIN. A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC



FL46965

DATE: 08.08.2024 DWG. BY:

CHK. BY: SH


NTS


EWS044 DWG. #:

SHEET:

SCALE:



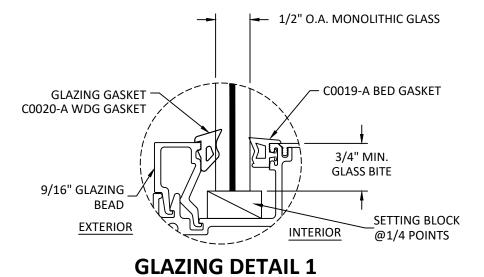

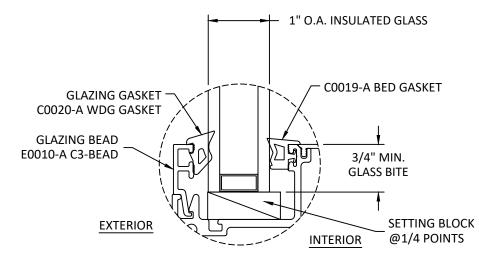

GLAZING DETAIL 2

GLAZING NOTES:

- 1. GLASS TYPE SHALL COMPLY WITH ASTM E1300 REQUIREMENTS.
- 2. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
- 3. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
- GLASS TYPE SHALL COMPLY WITH APPLICABLE GLAZING REQUIREMENTS PER CHAPTER 24 OF THE FBC

euro-wall°

EURO-WALL, LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876

""LE: VISTA DIRECT SET (NON-HVHZ) (NON-IMPACT) GLAZING DETAILS

3UILDING DROPS, II 1900 NE MIAMI COURT, SUITE 2-MIAMI, FL 33132 PH: (954)399-8478

REMARKS BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENER THE INSTALLATION DETAILS SECURISE OF THE REAL HARD GENERAL STEE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL46965

DATE: 08.08.2024

DWG. BY: SH

SCALE:


CHK. BY: HFN NTS

DWG. #:

EWS044

SHEET:

2

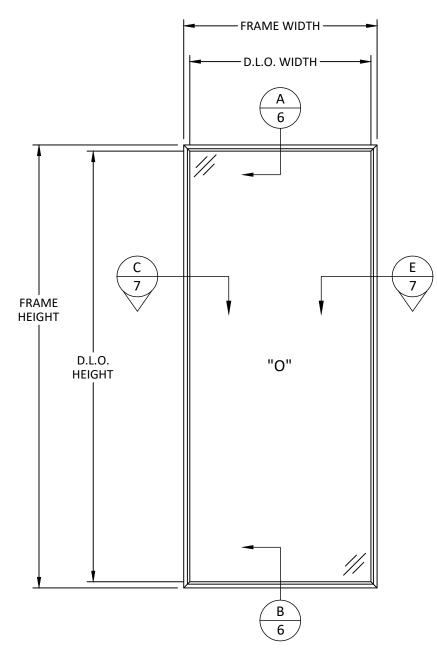


ELEVATION SINGLE UNIT

DAYLIGHT OPENING CALCULATIONS: • D.L.O. HEIGHT = FRAME HEIGHT - 4.0"

• D.L.O. WIDTH = FRAME WIDTH - 4.0"


	CINICLE LINIT DECICAL PRECCURE TARLE (DCE)													
	SINGLE UNIT DESIGN PRESSURE TABLE (PSF)													
	FRAME WIDTH (IN.)													
		36	42	48	54	60	66	72	78	84	90	96	102	108
	78	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	53.8	53.8	53.8	53.8	53.8
	84	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	50.0	50.0	50.0	-
	90	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	46.7	46.7	1	-
	96	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	46.7	-	-	-
Š	102	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	-	-	-	-
HEIGHT (IN.)	108	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	-	-	-	-	-
E1GF	114	70.0	70.0	70.0	70.0	70.0	63.6	58.3	-	-	-	-	-	-
	120	70.0	70.0	70.0	70.0	70.0	63.6	58.3	-	-	-	-	-	-
FRAME	126	70.0	70.0	70.0	70.0	70.0	63.6	-	-	-	-	-	-	-
FR	132	70.0	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-
	138	70.0	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-
	144	70.0	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-
	150	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-	-
	156	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-	-
	162	70.0	70.0	70.0	-	-	-	-	-	-	-	-	-	-
	168	70.0	70.0	70.0	1	1	1	1	-	-	1	-	-	-



UNITS OF ALTERNATE SHAPES ARE ALLOWED PROVIDED CONSTRUCTION, GLAZING, & ANCHORAGE ARE PER DETAILS SHOWN HEREIN. ALL SHAPED UNITS SHALL FIT WITHIN THE RECTANGULAR AREAS AS SHOWN.

- MAXIMUM AREA (RECTANGLE UNITS)= 60" X 144"
- MAXIMUM DP = +/- 70 PSF

NOTE: WINDOW WIDTH AND HEIGHT ARE INTERCHANGEABLE FOR ALL SIZES SHOWN HEREIN NOT TO EXCEED MAXIMUM QUALIFIED SQUARE FOOT AREA.

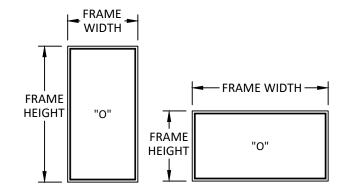



EURO-WALL, LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876

"ILLE: VISTA DIRECT SET (NON-HVHZ) (NON-IMPACT)

ELEVATION & DP TABLE SINGLE UNIT

PREPARED BY:

BUILDING DROPS, IN
1900 NE MIAMI, EI 33132
PH: (954)399-8478
FAX: (954)744 4738
FAX: (954)744 4738

REMARKS BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERI THE INSTALLATION DETAILS SECURISE OF THE REAL HARD GENERAL STEE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



1900 NE MIAMI COURT, SUITE 2-15 MIAMI, FL 33132 FBPE CERT. OF AUTHORIZATION No. 29578

FL#: FL46965

DATE: 08.08.2024 CHK. BY:

DWG. BY: SH


HFN NTS

EWS044 DWG. #:

SHEET:


SCALE:



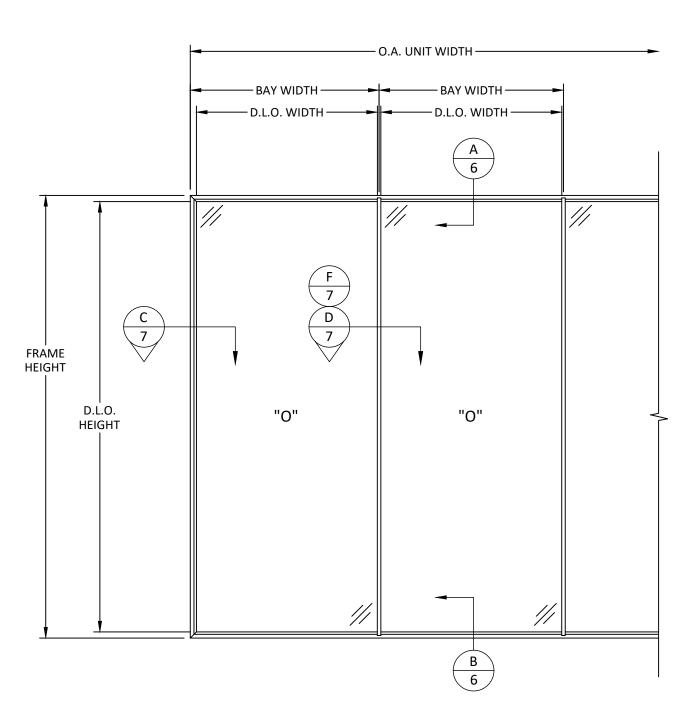

	MULLED UNIT DESIGN PRESSURE TABLE (PSF)													
						,	WIDTH (W) (IN.)						
		36	42	48	54	60	66	72	78	84	90	96	102	108
	78	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	53.8	53.8	53.8	53.8	53.8
	84	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	50.0	50.0	50.0	-
	90	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	46.7	46.7	-	-
	96	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	46.7	-	-	-
S.	102	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	50.0	-	-	-	-
HEIGHT (IN.)	108	70.0	70.0	70.0	70.0	70.0	63.6	58.3	53.8	-	-	-	-	-
EIG	114	70.0	70.0	70.0	70.0	70.0	63.6	58.3	-	-	-	1	1	-
ЕН	120	70.0	70.0	70.0	70.0	70.0	63.6	58.3	-	-	-	-	-	-
FRAME	126	70.0	70.0	70.0	70.0	70.0	63.6	-	-	-	-	-	-	-
FR	132	70.0	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-
	138	70.0	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-
	144	70.0	70.0	70.0	70.0	70.0	-	-	-	-	-	-	-	-
	150	70.0	70.0	70.0	67.6	-	-	-	-	-	-	-	-	-
	156	70.0	70.0	66.6	59.8	-	-	-	-	-	-	-	-	-
	162	70.0	67.2	59.3	-	-	-	-	-	-	-	-	-	-
	168	69.7	60.2	53.1	-	-	-	-	-	-	-	-	-	-

TRIBUTARY WIDTH (W) = (A+B)/2

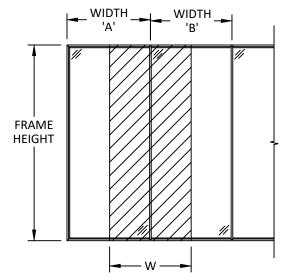

• D.L.O. HEIGHT = FRAME HEIGHT - 4.0"

euro-wall°

EURO-WALL, LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876


"ILLE: VISTA DIRECT SET (NON-HVHZ) (NON-IMPACT) ELEVATION & DP TABLE MULLED UNIT

PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI COURT, SUITE 2-15
MIAMI, FL 33132
PH: (954)7399-8478
FAX: (954)744.4738

REMARKS BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERI THE INSTALLATION DETAILS DESCRIBED FIRERIN ARE GENERAL MAD MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

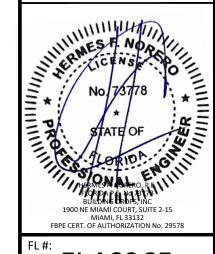

FL46965

DATE: 08.08.2024

DWG. BY:

SCALE:

SHEET:

CHK. BY: NTS

EWS044 DWG. #:




OF 7

ELEVATION MULLED UNIT

DAYLIGHT OPENING CALCULATIONS: • D.L.O. WIDTH = TRIB. WIDTH - 2.3"

4.00" FROM _ CORNERS 14.50" MAX. O.C. 17.00" MAX. O.C. "O" 17.00" MAX. O.C. 4.00" FROM **CORNERS** 14.50" MAX. O.C.

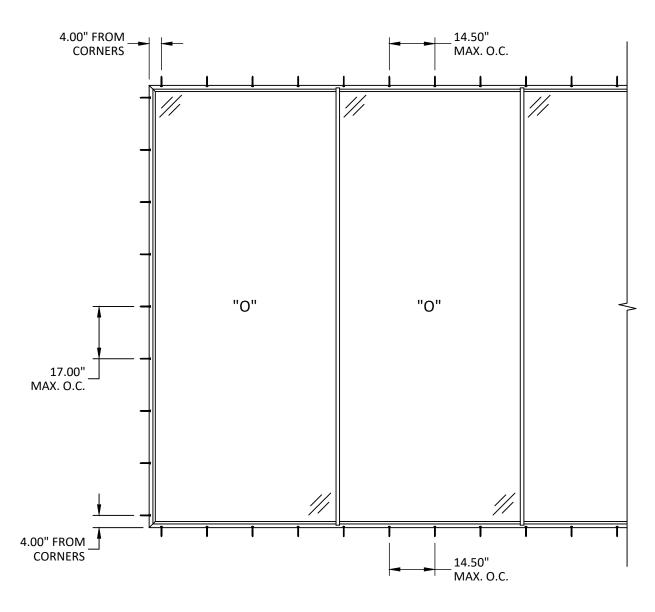

ANCHOR LAYOUT THROUGH FRAME INSTALLATION

ANCHOR LAYOUT THROUGH FRAME INSTALLATION



EURO-WALL, LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876

INDE: VISTA DIRECT SET (NON-HVHZ) (NON-IMPACT) ANCHOR LAYOUTS

REMARKS

BUILDING DROPS, INC. 1900 NE MIAMI COURT, SUITE 2-15 MIAMI, FL 33132 PH: (954)399-8478

BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERI THE INSTALLATION DETAILS DESCRIBED THEREIN ARE GENERAL NAID MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFI SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



1900 NE MIAMI COURT, SUITE 2-15 MIAMI, FL 33132 FBPE CERT. OF AUTHORIZATION No. 29578

FL46965

DATE: 08.08.2024

DWG. BY:


CHK. BY: NTS

EWS044 DWG. #:


SHEET:

SCALE:

5

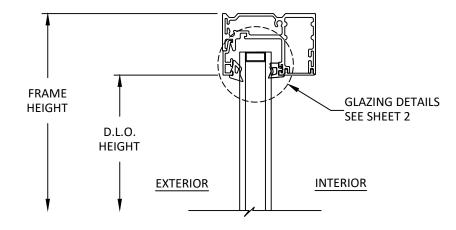



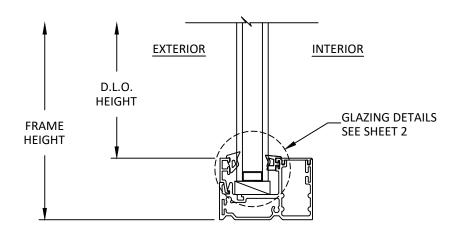






EURO-WALL, LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876

(NON-HVHZ) (NON-IMPACT) VERTICAL SECTIONS

BY:
BUILDING DROPS, INC.
1900 NE MIAMI COURT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744.4738
FAX: whildingdrops.com

REMARKS BY DATE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERI THE INSTALLATION DETAILS DESCRIBED FIRERIN ARE GENERAL MAD MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



1900 NE MIAMI COURT, SUITE 2-15 MIAMI, FL 33132 FBPE CERT. OF AUTHORIZATION No. 29578

FL #:	
	FL46965

DATE: 08.08.2024

DWG. BY:

SCALE:


CHK. BY: NTS

EWS044 DWG. #:


SHEET:






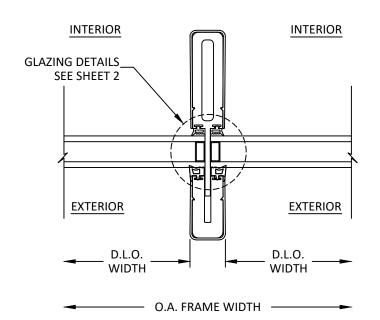



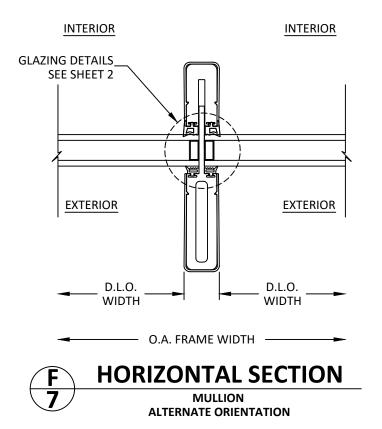

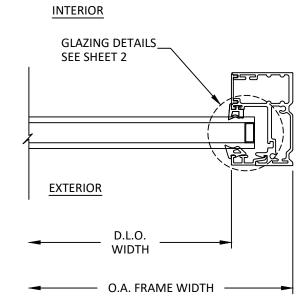





EURO-WALL, LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876

""LE: VISTA DIRECT SET (NON-HVHZ) (NON-IMPACT)


REMARKS

HORIZONTAL SECTIONS

3UILDING DROPS, INC. 1900 NE MIAMI COURT, SUITE 2-15 MIAMI, FL 33132 PH: (954)399-8478

BY DATE

HE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENER FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



1900 NE MIAMI COURT, SUITE 2-15 MIAMI, FL 33132 FBPE CERT. OF AUTHORIZATION No. 29578

FL46965

DATE: 08.08.2024 CHK. BY:

DWG. BY:


SCALE:


HFN NTS


DWG. #:

EWS044

SHEET:

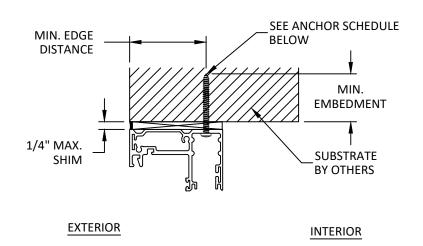

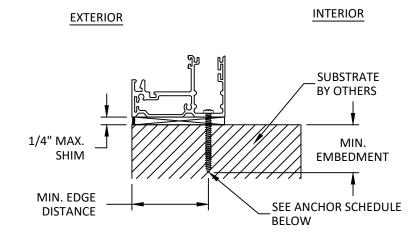

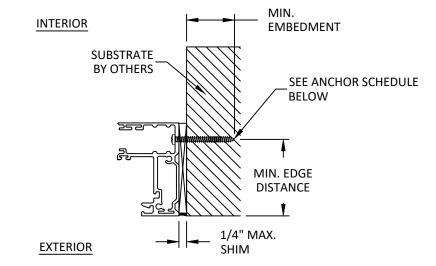



8 ANCHOR DETAIL
SILL

(C)	ANCHOR DETAIL
8	JAMB

ANCHOR SCHEDULE							
SUBSTRATE	ANCHOR TYPE	MIN. EMBEDMENT	MIN. EDGE DISTANCE				
WOOD: MIN. SG = 0.55	5/16" DEWALT ULTRACON	1-1/2"	1-9/16"				
METAL: STEEL 18 GAUGE, MIN. Fy = 33KSI	5/16" SELF-DRILLING OR SELF-TAPPING SCREW						
METAL: ALUMINUM (6063-T5) MIN 1/8" THICKNESS	5/16" SELF-DRILLING OR SELF-TAPPING SCREW	3 THREADS MIN PENETRATION BEYOND METAL	1/2"				
CONCRETE: f'c=3000PSI	5/16" DEWALT ULTRACON	1-3/4"	2-1/2"				
MASONRY: GROUT FILLED CMU PER ASTM C90	5/16" DEWALT ULTRACON	1-3/4"	2-1/2"				



EURO-WALL, LLC P.O. BOX 8007 NORTH PORT, FL 34290 PH: 888-989-3876

(NON-HVHZ) (NON-IMPACT)

(INON-HVHZ) (NON-IMPACT)


INSTALLATION DETAILS & ANCHOR SCHEDULE

REMARKS

BUILDING DROPS, IN 1900 NE MIAMI COURT, SUITE 2-1 MIAMI, FL 33132.
PH: (954)399-8478
FAX: (954)7444738

BA DALE

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERI AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFI SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL46965

DATE: 08.08.2024
DWG. BY: CHK. BY:

DWG. BY: SH SCALE:

NTS

DWG. #: **EWS044**

SHEET:

