









A New Window on the World





Introducing Vista CT™, a cutting-edge, thermally broken window system by Euro-Wall that combines strength, versatility, and effortless operation. Designed to enhance both residential and commercial spaces, Vista CT™ is the first operable window in Euro-Wall's lineup, engineered for larger and more robust applications than typical window systems. Our innovative Mull-Link™ system eliminates the need for anchors or clips at the mull location for multi window applications. In combination with Euro-Wall's folding, sliding, pivot and direct set fixed windows, the Vista CT™ enables whole home packages from Euro-Wall as a single source provider.

With Euro-Wall's signature white-glove sales and installation support, Vista CT™ redefines ease of use, durability, and performance for any space.



System Thresholds

MAXIMUM / MINIMUM SPECIFICATIONS

SINGLE UNIT

MAX. SASH HEIGHT
MAX. SASH WIDTH
MIN. SASH HEIGHT
MIN. SASH WIDTH

IMPACT RATED	NON-IMPACT RATED
120"	120"
52"	52″
18"	18"
18"	18"

MULTIPLE UNITS

MAX. SASH HEIGHT
MAX. SASH WIDTH
MIN. SASH HEIGHT
MIN. SASH WIDTH

HVHZ	WZ3 & NON-IMPACT
96"	120"
52"	52″
18"	18"
18"	18"

Note: For installations in Florida, please see the Florida Product Approval (FL47078) for usage and limitations.



10-Year Limited Warranty

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years.









DESIGN PRESSURE CHART (SINGLE UNITS)

Impact, HVHZ & WZ3

Frame Width

		28	34	40	46	52
	48	80	80	80	80	80
	54	80	80	80	80	80
	60	80	80	80	80	80
ا يا	66	80	80	80	80	80
Height	72	80	80	80	80	80
	78	80	80	80	80	80
Frame	84	80	80	80	80	80
ž	90	80	80	80	80	80
	96	80	80	80	80	80
	102	80	80	80	74.7	
	108	80	80	71.9	62.8	
	114	80	71.6	61		
	120	74.3	61.3	52.3		

Test Performance

Air Infiltration: ASTM E283/E283M-19

Water Infiltration: ASTM E331-00

Wind Load: TAS 202-94

Large Missile Impact: TAS 201-94

Cyclic Pressure: TAS 203-94 **Static Pressure:** TAS 202-94

Forced Entry: ASTM F588-17







#FL47078

DESIGN PRESSURE CHARTS (MULTIPLE UNITS)

Impact, HVHZ & WZ3


Tributary Width

		28	34	40	46	52	
	48	80	80	80	80	80	-
	54	80	80	80	80	80	
	60	80	80	80	80	80	
	66	80	80	80	80	80	
Height	72	80	80	80	80	80	— ни
	78	80	80	80	80	80	
Unit	84	80	80	80	80	80	
วั	90	80	80	80	80	80	
	96	80	80	80	80	80	
	102	80	80	80	72.6	Ъ	
	108	80	79.3	68.4	60.6		
	114	80	67.1	57.8		— WZ3	
	120	68.9	57.3	49.4	-		

^{*}Reference the Euro-Wall website for Non-Impact and full FPA details.



Glazing Details



OVERALL GLASS THICKNESS

1/4" | 1/2" | 9/16" | 1"

We can handle most any type of glass if it meets the required thickness. Let's talk.

Finish Options

STANDARD FRAME & SASH FINISHES





Arcadia Silver







Black

Clear Anodized

Standard finish is Sunstorm Arcadia Silver (Kynar® Amma 2605)

OTHER FRAME & SASH FINISHES

- · Kynar® Liquid Paint or Powder Coat finishes available
- · Custom powder coat or Kynar® finishes available
- · Custom faux woodgrain finishes available

INTERIOR WOOD CLAD FINISH OPTION

- · Mahogany / sapele
- · White oak
- · Additional wood species available



Wood Clad Finishes

Our interior-only wood-clad finish options include our standard finishes of white oak and mahogany / sapele. Additionally, we offer a variety of exotic wood species for cladding (see samples below).

Standard Wood Cladding Finishes





Additional exotic clad finishes available upon request and seasonality.

Exotic Wood Clad Finishes

















Note: The colors shown are an approximation of actual colors and finishes. Actual finishes may vary slightly.

Single Unit CAD details

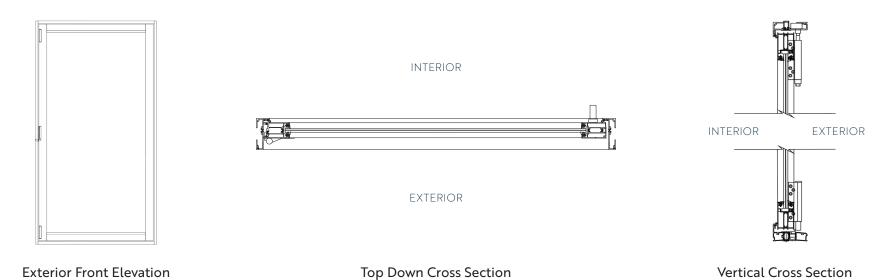

Multi-Unit CAD details

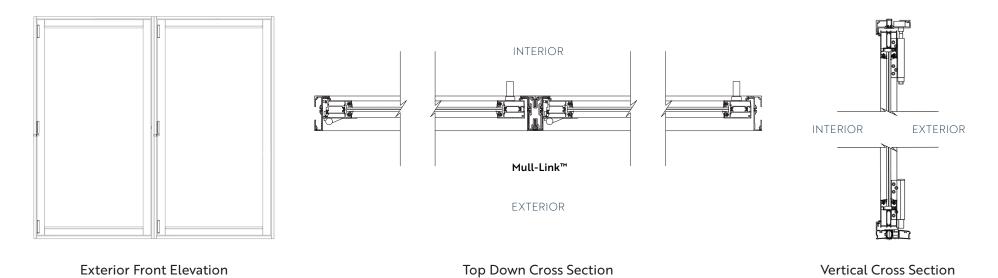





euro-wall.com

f h X @ P in



MANUFACTURING & SHOWROOM

2200 Murphy Ct. North Port, FL 34289 888.989.EURO (3876)

SHOWROOM

1211 Stirling Rd., Unit 102, Dania Beach, FL 33004 941.979.5316 EURO-WALL UNLOCKS breathtaking perspectives

THROUGH THE largest, strongest DOOR & WINDOW

SYSTEMS WITH THE MOST DESIGN OPTIONS – ALL

BACKED BY enjoyable, personal SUPPORT – FOR A superior

experience FROM OPEN TO CLOSE.





