V2. 102026

EURO-WALL®

VISTA CT™ INSTALLATION GUIDE

MANUFACTURING

2200 Murphy Court
North Port, Florida 34289
888.989.3876 • 941.979.5316

888.989.EURO (3876)
www.euro-wall.com

SHOWROOM

1211 Stirling Road, Unit 102,
Dania Beach, Florida 33004
954.610.2572

Important
Before beginning the install, read the instructions in their entirety. Perform install using the recommended methods contained within this guide. Deviating from recommended install procedures could impair functionality and could void any warranty.

Caution
It is the obligation of the building owner, contractor, architect or installer to ensure that window systems being installed comply with all building codes and regulations pertaining to the install location. Euro-Wall Systems, Inc. assumes no responsibility for failure to meet applicable laws, ordinances, building codes, etc.

Description of Supplied Parts
Upon delivery please inspect for any noticeable damage and check supplied materials with included packing list. If there is any damage and / or any missing components, please contact Euro-Wall as soon as possible. For installs with multiple opening units, do not mix and match any components even if the units are the same dimensions.

Protection of Unit During Construction
It is important that during the construction phase the window system components are protected and covered in a clean dry location away from any factors that could cause damage. Window systems that are stored during the construction phase can often times be exposed to situations that can cause permanent damage such as cement splatter, tar, paint,weld spray, falling objects, construction dust, sandblasting, etc. After installation of the window system is completed and construction is still being performed, ensure that the large opening where the window system is installed does not become a major in and out access point for contractors and subcontractors. Damage done during the construction phase can be irreparable and can cause significant setbacks with new sashes needing to be constructed.

Considerations Before You Get Started
Space: Make sure you have the appropriate working space in and around the install opening. It is best practice to assemble the frame on top of saw horses (using at least four, one for each corner), therefore, make sure you have adequate room to assemble the frame in the area around the opening. Additionally, leave plenty of room without clutter to maneuver sashes during install.

Power: Ideally power should be connected and accessible for tool operation and to ensure optimal lighting conditions for the install.

Moving Sashes: Never “walk sashes” and never try to move sashes with only one person. Always lift and move sashes by hand or using glass suction cups using at least two people. For installs less than 8’ in height, use a minimum of two installers. For sashes over 8’ tall, a team of four is recommend for the install.

2026 Euro-Wall, LLC • www.euro-wall.com

A. Tools Required

Step A.1 - Tools Checklist

Please make sure you have all of the required tools listed below before performing the install.

- ✓ Screw guns and chargers
- ✓ Extension bits Phillips #2 / #3 for tapcons
- ✓ Drill bits for steel, concrete and wood
- ✓ 11/64”, 3/16”, and 3/4” drill bits
- ✓ #21 drill bit
- ✓ #10-32 tap
- ✓ Hand screwdrivers (Phillips #2 and #3)
- ✓ Rubber mallet
- ✓ SDS gun
- ✓ Tape measure
- ✓ Laser level
- ✓ 2’, 4’ and 6’ levels
- ✓ Pencil
- ✓ Chalk line
- ✓ String line (for measuring square)
- ✓ Handsaw or similar cutting tool
- ✓ Snips
- ✓ Saw horses (min 4)
- ✓ Glass cups for moving sashes (min 4)
- ✓ Shop-Vac
- ✓ Broom / dustpan
- ✓ Garbage can / garbage bags
- ✓ Copy of install guide
- ✓ Pry bar or similar tool

Step A.2 - Disposables Checklist

Please make sure you have all of the required tools listed below before performing the install.

- ✓ Tapcons (if drilling into concrete)
- ✓ Screws for installing frame into substrate
- ✓ Caulk / 100% silicone
- ✓ DOW 795
- ✓ Lubricant / wax
- ✓ Shims
- ✓ Windex / glass cleaner
- ✓ Clean rags
- ✓ Paper towels
- ✓ Cardboard / moving blankets

Step A.3 - Labor Checklist

Please make sure you have the adequate number of installers

- ✓ For installations with sashes under 8 feet, recommended minimum of 2 installers
- ✓ For installations with sashes over 8 feet, recommended minimum of 4 installers

2026 Euro-Wall, LLC • www.euro-wall.com

B. Parts / Pieces Included

Below you will find a summary of the parts and pieces that are included with the window system. For a comprehensive checklist please see the packing list included with your order.

Step B.1 - Frame Checklist

- ✓ Jambs (2) (E0021)
- ✓ Header (1) (E0021)
- ✓ Frame weatherstripping (C0114) *see **Figure B.2***
- ✓ Sill (1) - standard (E0023)
- ✓ Mull Link - multi-units only (E0236)
- ✓ U-Channel / sill liner (E0083)

Step B.2 - Sash Checklist

- ✓ Sash weatherstripping large - *see **Figure B.2** to distinguish between the two different weatherstripping types*

FIGURE B.1: SILL

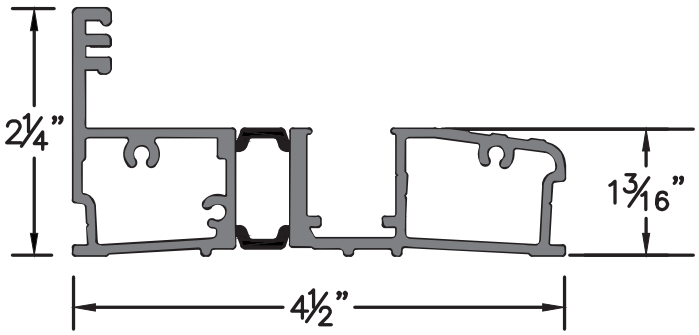

Standard Sill
E0023

FIGURE B.2: SASH WEATHERSTRIPPING PROFILES

Sash
Weatherstripping Large
"Large P Weatherstripping"
C0112

Frame
Weatherstripping
C0114

2026 Euro-Wall, LLC • www.euro-wall.com

Step B.3 - Hardware / Handles Checklist

NOTE: The hardware included with your install package will vary depending on the install configuration. Please check your parts packing list for the hardware & handles specifications for this installation. All Interior wood clad veneer products should be properly finished or sealed within 36 hours of delivery or stored in a climate controlled space until it can be properly finished or sealed.



C0104
LORI Center Wall Pivot Hinge

C0210
LORI Center Wall Pivot Cup



C0105
ROLI Center Wall Pivot Hinge

C0210
ROLI Center Wall Pivot Cup

C0352
Twin Point Lever



C0357
Kora Handle



C0359
Window Pull



C0356
Friction Stay and Limiter

C0336
Sill Block

C0384
FSM Block



CO210
Twinpoint Cup

C0134
Allen Key



C0175
Frame Screw



C0132
Hinge Screw

C0092
Block Screw



C0398
Window Pull Screw

C. Opening Preparation

Step C.1 - Measure, Level, Square & Clean

- ✓ Measure opening at least 3 points *(see **Figure C.1**)* to check for plumb, square and level of the opening
- ✓ Ensure that there is only a maximum header deflection of 3/16” or less
- ✓ Vacuum / sweep opening to be clear of dust / dirt / debris

FIGURE C1: MEASURING THE OPENING

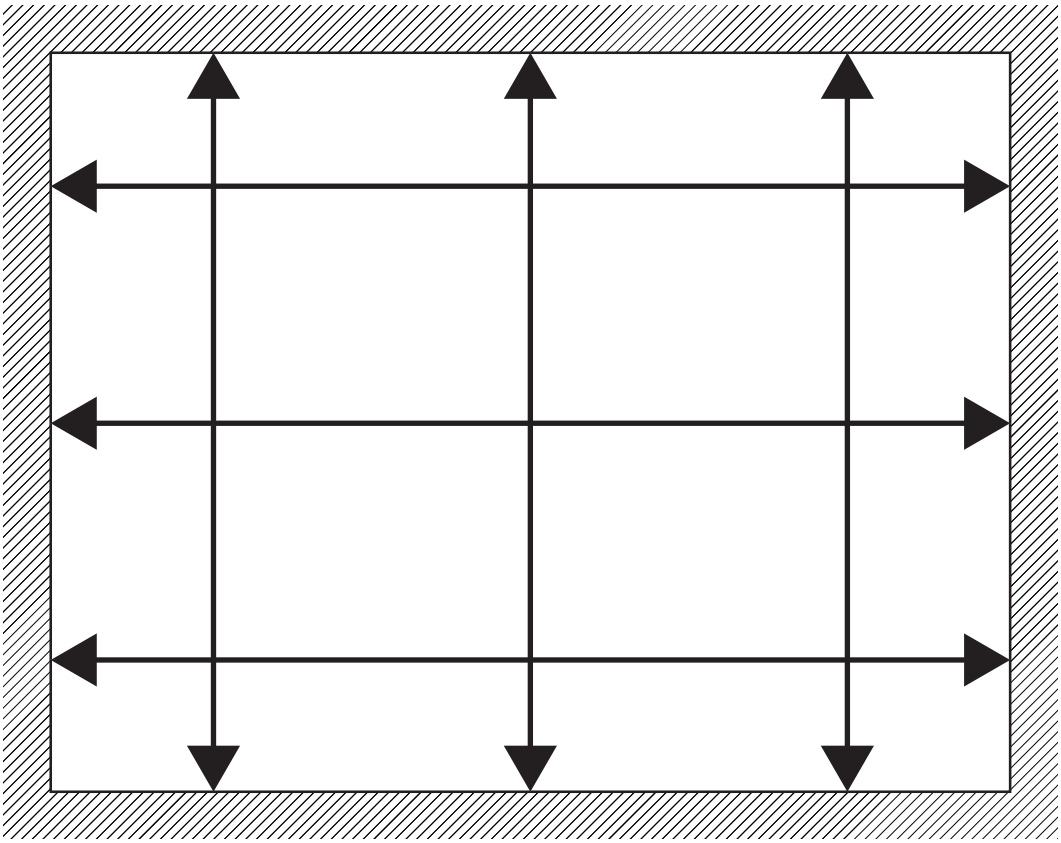

2026 Euro-Wall, LLC • www.euro-wall.com

D. Frame Assembly

Step D.1 - Frame Assembly Preparation

Place the frame as it will be assembled on 4 sawhorses near the opening. Sawhorses should be padded / wrapped to protect the frame from scratches or damage. **DO NOT ASSEMBLE FRAME ON THE GROUND.**

Step D.2 - Connect Header (E0021) to Jambs (E0021)

Before assembling the frame, dip the frame screws (C0175) into wax or other lubricant. Seal the jambs (E0021) along the edge with 100% silicone. Align the jamb and header (E0021) together and connect securely with frame screws at the three pre-drilled locations. Drill at a moderate speed to avoid stripping or breaking screws. Repeat steps for other jamb.

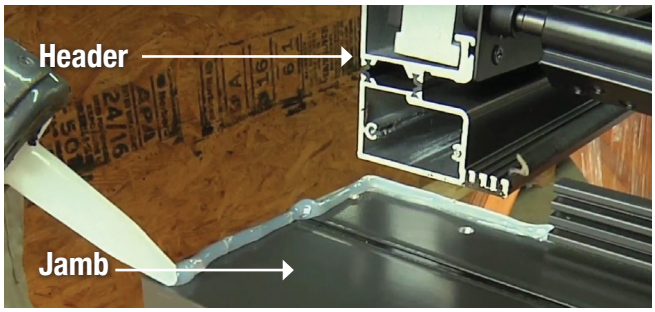

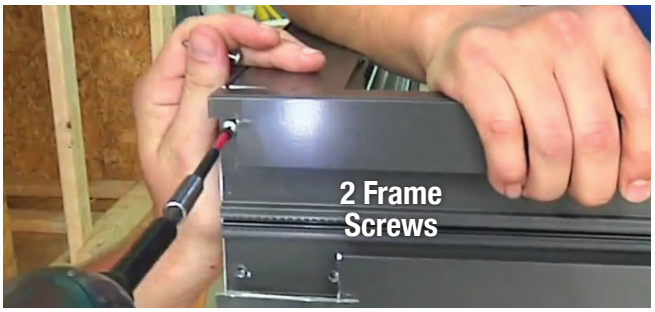

Step D.3 - Connect Sill (E0023) to Frame

Seal edge of sill (E0023) with 100% silicone. Snug the jamb (E0021) to the sill and with waxed / lubricated frame screws, screw sill into the jamb into the three pre-drilled locations. Repeat steps for other side of the sill.

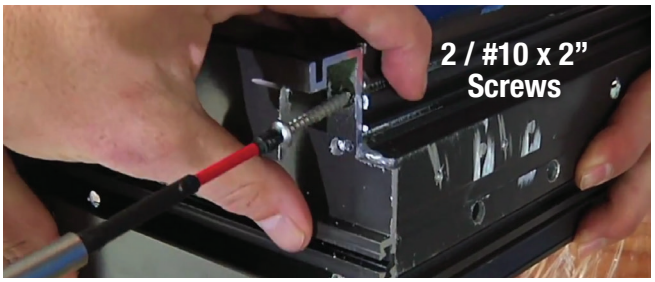

E. Frame Weatherstripping (C0114)

Step E.1 - Install Weatherstripping (C0114) into the Jamb (E0021)

Place protruding end of weatherstripping (C0114) into the first slot / groove of the jamb and push down to snug. Slide the weatherstripping all the way down to the sill snugging down the entire length of the jamb. Run over the entire weatherstripping to ensure a tight fit reaching the header. At the header location use snips and cut weatherstripping flush with the top of the header.

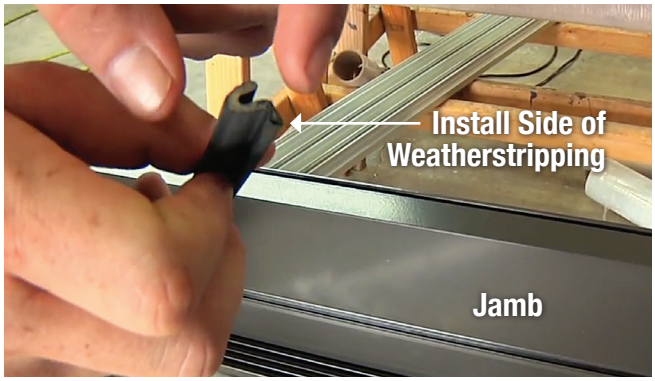

Step E.2 - Install Weatherstripping (C0114) into Header (E0021)

Following the same process used in installing the weatherstripping (C0114) into the jamb (E0221), place protruding end of the weatherstripping into the first slot / groove of the header (E0221). Slide weatherstripping towards the jamb where the previously installed weatherstripping is. Move weatherstripping all the way to the jamb and over top of the jamb weatherstripping making sure they touch creating a seal. Trim to fit.

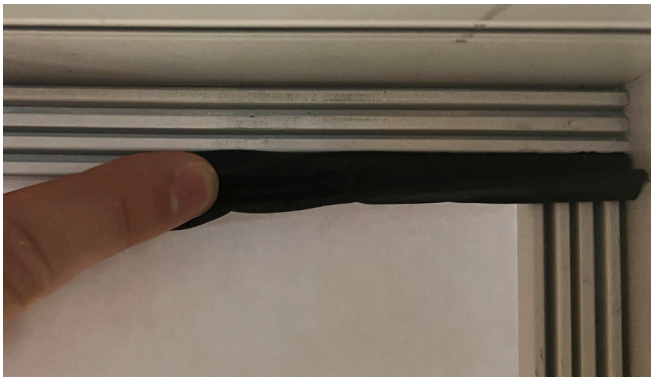

Step E.3 - Install Weatherstripping (C0114) into Sill (E0023)

Install the weatherstripping (C0114) on the top groove of the sill (E0023) riser all the way across the sill touching both jamb side weatherstripping applications. Trim to fit with snips.

2026 Euro-Wall, LLC • www.euro-wall.com

F. Mull-Link Install

Step F.1 - Line Up Mull Link (E0236)

If the unit consists of multiple sections, you will be required to connect each section with a mull link (E0236) piece. Place the left and right sections side-by-side with the connecting jambs facing each other.

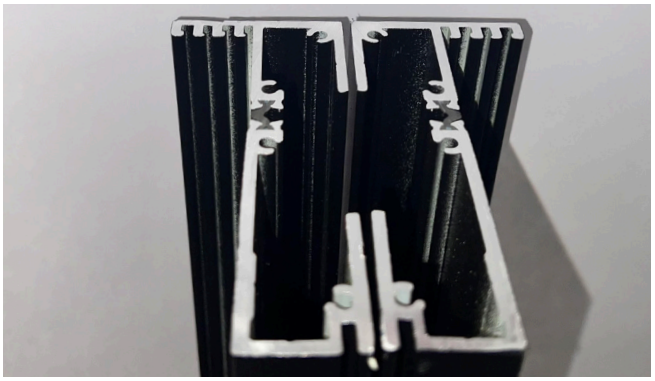

Step F.2 - Slide Mull Link (E0236) into Place

Slide the mull link (E0236) piece into place by starting the end into each jamb, and then sliding the mull link in until flush. Use a rubber mallet if necessary. Repeat as necessary.

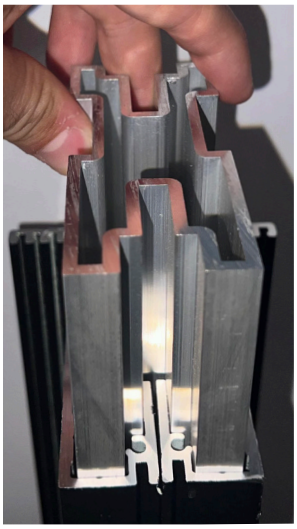

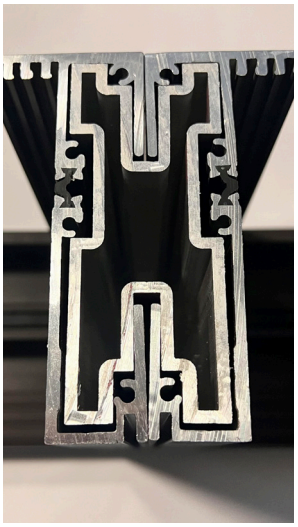

G. Dry Fit Frame

Step G.1 - Fit and Tack Frame into Place

Make sure opening is clean and clear of dirt / debris. Move frame into opening verifying opening is large enough. With the frame in position, temporarily tack into place through the jambs. All anchor screw locations on the frame come pre-drilled.

2026 Euro-Wall, LLC • www.euro-wall.com

Step G.2 - Level & Plumb Frame

Check sill for level and plumb, shim where necessary. There should be no more than 1/16” sill sag at the center span of the sill. There should be no bow in the sill at any location.

Step G.3 - Pre-Drill Opening Substrate

Once the frame is shimmed and leveled, prepare the substrate by drilling through all frame anchor screw locations into the opening substrate where necessary. The type of drill bit used will vary depending on the substrate. Remove frame and vacuum / sweep clean of debris.

(Refer to product approval for anchor schedule.)

H. Install the Frame

Step H.1 - Sealing Sill Opening

Make sure opening is clean of all dirt and debris. Seal sill opening location with DOW 795 or 100% silicone. Place frame into opening and make sure the entire sill is embedded in the sealant.

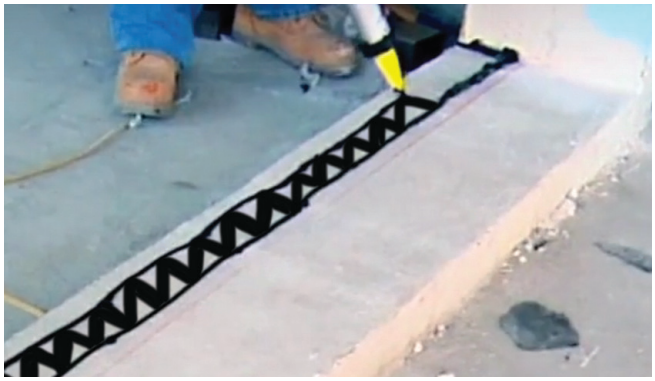

2026 Euro-Wall, LLC • www.euro-wall.com

Step H.2 - Securing the Sill

Position frame so that the jamb is plumb and level with adequate space for shimming and then tack into place. Follow the same steps for the second jamb. Proceed to securing the sill. Level the sill placing shims at least at every other pre-drilled anchor screw location and anywhere else shimming is needed. Dip screws in 100% silicone and secure sill at every anchor screw location. Ensure that the sill remains level after every anchor location is secured and adjust as necessary.

Step H.3 - Securing the Jambs

Re-check jambs for level and plumb. Place shims behind every anchor screw location and screw jamb into place. Do not over tighten screws as this could cause the frame to bow. After screwing the jambs securely into the opening, check again for level and plumb.

Step H.4 - Securing the Header

Starting at either of the jambs, shim and secure the header into place proceeding down the entire length of the header checking for level with a two foot level. The screw used to secure the header must penetrate at least 1 1/2” into the opening substrate and the bolt head should not interfere with the window operation. Take care not to over tighten screws as this could cause the header to pinch creating window operation issues. After header is secured, re-verify level with a four foot level noting that there is a maximum allowed deflection of 3/16”.

NOTE: Material used to insulate the shim space between the frame and the opening should be a non-expandable material.

I. Install the Sashes

Step I.1 - Install the Center Wall Pivot Cup (C0104/C0105)

ONLY FOR SASHES OVER 66” TALL

Locate the pre-drilled center wall pivot location on the jamb and using a 3/4” drill bit drill through the center wall pivot hole and into the opening substrate. Drill deep enough so that the center wall pivot cup (C0104/C0105) can be seated.

NOTE: If the substrate you are securing into requires the use of tapcons, insert the center wall pivot cup into the jamb and use a 3/16” bit and drill through the v-drilled hole in the back of the pivot cup and into the substrate.



Step I.2 - Sash Installation Preparation

Before installing sashes, place wood, protective foam, cardboard or other similar protectant over the sill to protect from damage during the sash installation process. Additionally, have a ladder near the sash installation for ease of installation.

Each window sash comes with its own clearly labeled box which includes all hinges, hardware and screws for that particular sash. Locate those and set aside. Move the first jamb sash into position for install. When moving sashes, always move them with at least two people making sure to **NEVER “walk” the sashes.**

Incorrect

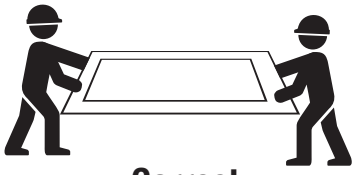

Correct

2026 Euro-Wall, LLC • www.euro-wall.com

Step I.3 - Kora Handle Installation (if applicable)

Your casement will be supplied with either a Kora handle (C0357) or a Twin Point lever (C0352) in the hardware box. Consult your drawings if you're unsure which one you received.

For Kora handles, remove the trim plate from the handle body. While the panel is on its side, fit the square spindle into the mechanism. Ensure the handle operates as intended before proceeding. With the handle operating, set it halfway open, which will make the screw holes visible. Secure the handle to the panel using the supplied screws (#10-32x1-1/2"). Install the trim plate removed in step 3.

Step I.4 - Window Pull (C0359) Installation (if applicable)

If your panel is wider than 24" (2'), your system will require a window pull, which is supplied in the hardware box. Locate the two holes on the bottom interior of the panel, they are predrilled with a #29 drill bit. Open the window pull package, removing the pull and two screws. Discard the screws in the pull package, instead, two (2) #8x3/4" long coarse thread screws (C0398) will be used and are provided in the hardware box. Align the holes in the window pull with the holes on the sash, using a screwdriver, secure the pull using the screws from the hardware box. Test to ensure pull is secured.

Step I.5 - Attach the Center Wall Pivot (C0104/C0105) to the Sash and Frame

ONLY FOR SASHES OVER 66" TALL

Screw and anchor the center wall pivot (C0104/C0105) to the first sash. Next, position sash by the jamb and slide the center wall pivot into the center wall sleeve.



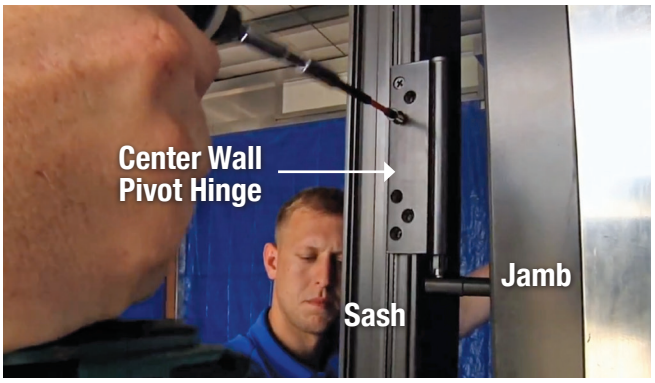

NOTE: Always support the weight of unsecured sashes with a protected flat / pry bar or similar tool when installing or making adjustments.

Step I.6 - Attach the Upper (C0069 / C0070) and Lower Jamb Hinges (C0071 / C0072)

NOTE: All upper jamb hinges (C0069 / C0070) come pre-installed in the header track. Also, each upper jamb hinge has a 2.5mm set screw for making adjustments. It is recommended that each carrier rod be rotated so the set screw is visible facing away from the riser allowing easy access for adjustments. If set screw is not accessible, the corresponding sash will have to be removed when making sash adjustments.

Attach the Upper Jamb Hinge (C0069 / C0070)

Align the upper jamb hinge (C0069 / C0070) with the pre-drilled hinge holes on the sash. You may need to adjust the upper jamb hinge up or down. The clearance of the sash and header should be no more than 3/8”. To adjust the upper jamb hinge, use the provided 2.5mm allen key (C0134) to loosen the allen bolt on the upper jamb hinge. Then use a 1/2” or 9/16” ratchet with an extension to raise or lower the upper jamb hinge to align with the sash hinge holes. **Please see section K** of this document for more details on making adjustments.

After holes are aligned, re-tighten the allen bolt and attach the upper jamb hinge to the sash with the provided hinge screws (C0132).



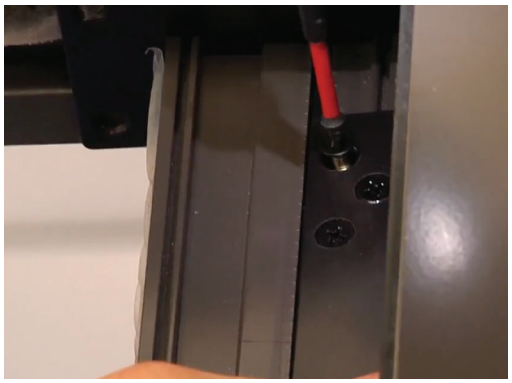

Attach the Lower Jamb Hinge (C0071 / C0072)

Attach the lower jamb hinge (C0071 / C0072) to the sash using the supplied hinge screws (C0132). Align the lower jamb hinge holes with the pre-drilled hinge screw holes on the frame and attach using the supplied screws. After the first jamb sash is installed, slowly open and close the sash making sure the sash does not rub against the header or the sill. Adjust as necessary.

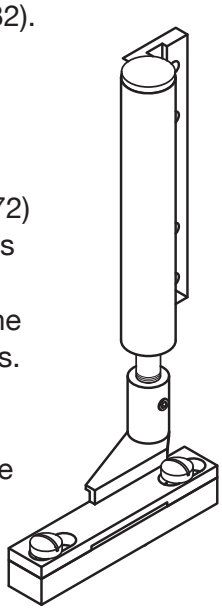

2026 Euro-Wall, LLC • www.euro-wall.com

J. Install Sash Weatherstripping (C0112)

Step J.1 - Weatherstrip Profiles and When / Where to Apply

The large p weatherstripping (C0112) always gets installed on the sash edges. When installing weatherstripping, the large side of the weatherstripping should face out towards the edge of the sash stile.

The large p weatherstripping also goes on the jamb side sash edges.

Large P Weatherstripping

2026 Euro-Wall, LLC • www.euro-wall.com

K. Horizontal / Vertical Adjustments

Step K.1 - Vertical Adjustments

To adjust the vertical alignment of your sash, you must first locate and loosen the set screw on the upper jamb hinges. With a 2.5mm allen key (C0134) loosen the set screw and adjust the drop down carrier pin bolt by using a 1/2” or 9/16” socket ratchet. Adjusting the dropdown carrier bolt will raise or lower the sash. Once the appropriate vertical adjustment has been made - re-tighten the set screw.

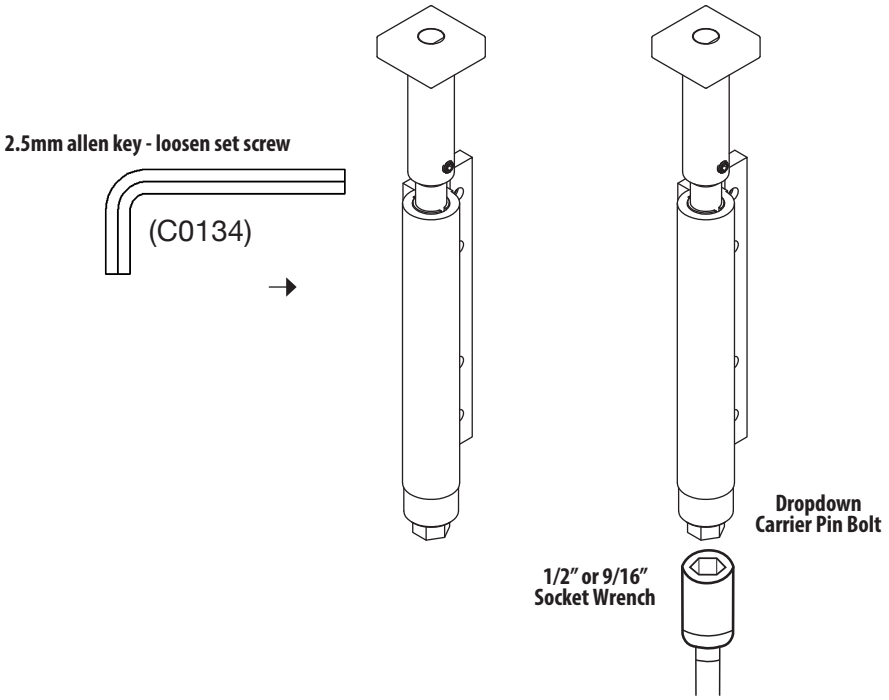

Step K.2 - Horizontal Adjustments

Lower Jamb Hinge Adjustment. Loosen the adjustment screws on the lower jamb mounting hardware and move the lower jamb hinge to the desired position. Once the appropriate horizontal adjustment has been made - re-tighten the adjustment screws using a #3 phillips screw driver.

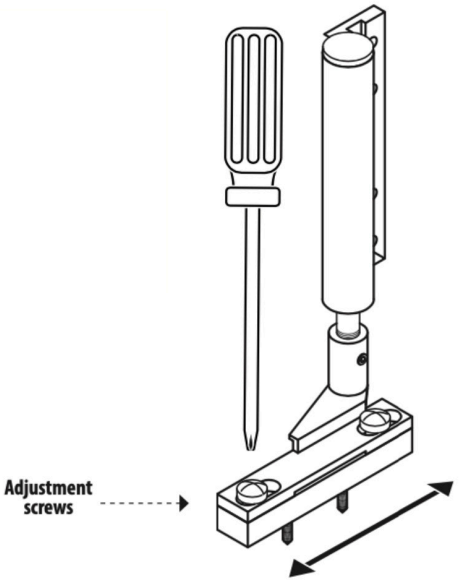

2026 Euro-Wall, LLC • www.euro-wall.com

L. Install the Friction Stay (C0356)

Step L.1 - Attach the Sash Arm

Attach the sash arm of the stay to the bottom of the sash using the pre-drilled holes under the bottom rail.

Step L.2 - Position the Frame

Place the frame portion into the sill, and slide the friction stay blocks (FSM) (C0384) underneath the housing.

Step L.3 - Locate the Stay

Fully open the casement (≥ 90°) and push the friction stay (C0356) flush with the exterior wall using the sill channel. Mark the location of the stay using a pencil.

2026 Euro-Wall, LLC • www.euro-wall.com

Step L.4 - Secure & Test the Stay

Using an 11/64” drill bit, drill two holes into the sill through each tab of the friction stay (C0356). Secure the friction stay using the provided #10-32 x 1-3/4” screws (C0092).

Test the operation of the stay by carefully opening and closing the system fully.

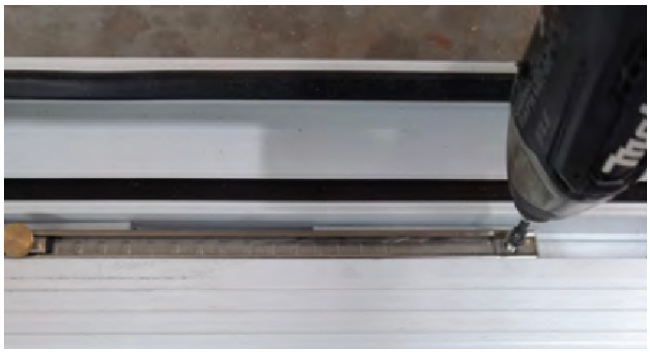

M. Prepare Sill for Shootbolt

Step M.1 - Drill for Shootbolt Location(s)

After the windows have been installed and adjusted engage the twinpoint shootbolt(s) and mark on the sill where the shootbolts make contact with the sill. Drill a 3/4” hole at your marked location(s) - this will allow the twinpoint shootbolts to secure into the sill when in the lock position. Use the diagram below to reference the sill used for your particular application and for the shootbolt drill location. Once the hole is drilled, add the provided cups (C0210) to the 3/4” holes. Repeat for the header.

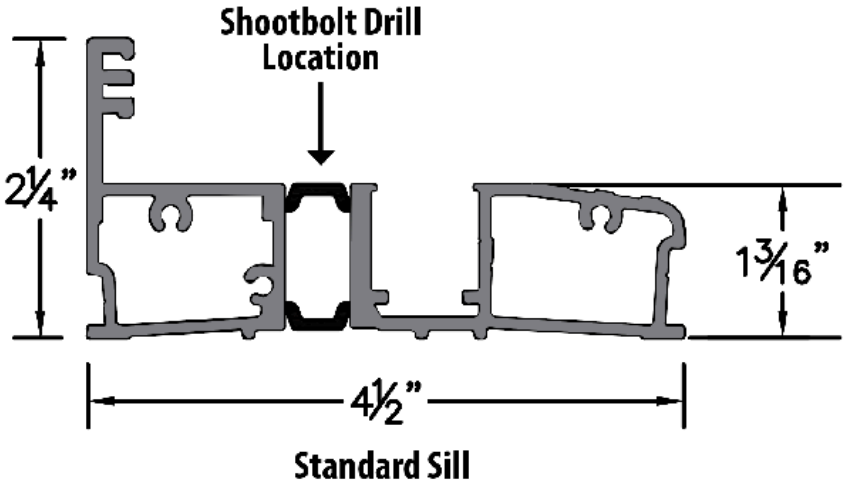

Step M.2 - Install Sill Block (C0336)

Install the sill block (C0336) from the hardware kit centered in front of the twin point cup (C0210), using two anchors into the substrate.

2026 Euro-Wall, LLC • www.euro-wall.com

N. Install U-Channel (E0083) / Sill Liner

Step N.1 - Install

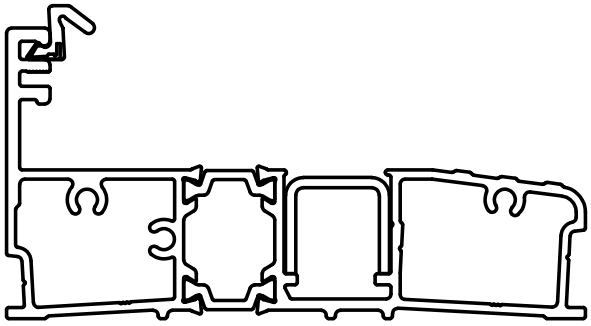

The last step in your installation will be installing the sill liner (E0083) / U-channel which covers the anchor screws in the sill. **If your install requires an inspection, DO NOT INSTALL SILL LINER UNTIL AFTER THE INSPECTION.** Once the sill liner is installed, it will need to be cut in order to remove it.

Measure and cut your sill liner to length. Starting at either jamb side, push one end of the sill liner into the sill channel until it snaps snuggly into place. Slide the sill liner underneath the bottom jamb hinge until it is pushed all the way against the jamb. You may now continue to push the rest of the sill liner into the sill channel by hand or with a rubber mallet.

NOTE CASEMENT SPECIFIC: Flip the U (∩) of the Sill Liner so that it is set flush with the sill channel.

O. Roller Catch - Strike Plate

Step O.1 - Install Roller Catch (C0074)

Install the roller catch (C00074) strike plate into the jambs using the predrilled holes. Units with mull links may need to be predrilled and tapped for a #10 screw using a #21 drill bit and a 10-32 standard tap.

P. Child Safety Device Installation (C0541,C0358)

This can be installed in the top or bottom of the system. Please consult with the project manager to determine their preference on placement.

Catch

Release

Step P.1 - How to Measure

For a 2” opening with the child safety device, place the Release 21” from the edge of the active sash to the center of the release. To maintain a maximum 4” opening, place it at 25-15/16”.

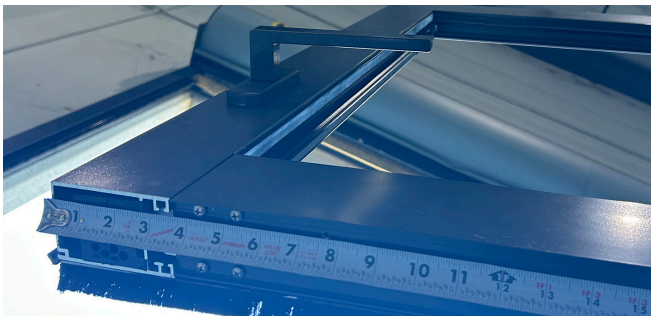

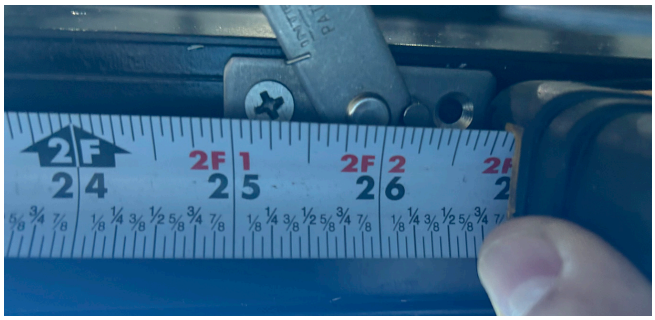

Step P.2 - Attaching the Release

Attach the Release flush with the Interior side wall with 2x#10x1-1/4” self-tapping screws (C0122) to the sash rail (Top or Bottom).

Step P.3 - Alignment to the Catch

Once attached, place the catch on either the header or sill. Make sure the catch corresponds with where you placed the release. Ensure the release lines up properly, and is flush to the interior riser. Mark the location of the screw holes with a pencil to keep the position marked.

Step P.4 - Attaching the Catch

After you’ve ensured it’s lined up, attach the catch with 2x #8x3/4” self tapping screws (C0398).

Step P.5 - Ensuring Functionality

Ensure the window opens and closes properly with the newly attached parts. To disengage the WOCD/ Child safety device, push the catch against the sash before the unit is open; this should allow it to swing free of the catch.

2026 Euro-Wall, LLC • www.euro-wall.com

Q. Maintenance & Care

Sash Protective Film

Remove all protective film from sashes, frames and any other metal extrusion within 30 days of job delivery. Failure to do so could cause finish damage voiding the product warranty.

Hinges

Wipe down the visible surfaces with warm soapy water on a soft cloth and then rinse off by wiping with a clean damp cloth.

Locks and Hardware

Wipe down the visible surfaces with warm soapy water on a soft cloth and then rinse off by wiping with a clean damp cloth. Spray a thin film of Boeshield T-9 (or other corrosion preventative spray such as CRC Marine 66, Innox or CorrosionX, or with machine oil) on any exposed hardware, including but not limited to: handles, locking mechanisms, hinges, unpainted or uncoated metal components, brackets, bearings, exposed screws etc. Be careful to avoid overspray and be sure to wipe down any overspray that does occur. Take care to avoid spray onto wood components, as staining may occur. Use a soft cloth to buff out any excess residual film.

Track and Bearings

Apply white petroleum jelly (Vaseline) or equivalent, to inner lip of each side of head track with a clean cloth. Distribute lubricant evenly along track. Ensure wheels and bearings receive sufficient lubricant. Wipe all contaminant from track surfaces with damp cloth and mild detergent, clean surfaces with clean soft cloth. Apply thin film for systems installed in severe environments by wiping surfaces of track with anti-corrosive substance, such as, CRC Marine 66®, Innox® or CorrosionX®.

Hangers, Pivots and Brackets

Before applying anti-corrosive substance, wipe exposed surfaces with clean soft cloth soaked in warm soapy water; then rinse, clean and dry. Spray thin film to hangers, pivots and brackets with anti-corrosive substance, such as, CRC Marine 66®, Innox® or CorrosionX®. Spray a thin film of Boeshield T-9 (or other corrosion preventative spray such as CRC Marine 66, Innox or CorrosionX, or with machine oil) and wipe off any overspray or excess residual film with a soft cloth.

Frequency

Regular maintenance is required for all hardware, even stainless steel, to keep manufacturer's warranty in place. Failure to provide proof of maintenance will void any warranty.

Carry out maintenance procedures with the following minimum recommendations:

- General environments - every 3 months
- Marine, industrial environments, within 5 miles of a body of water and / or a pool area - every month.
- Boeshield T-9 re-application: every 6 months for general environment, and up to every 3 months for marine/industrial environments, or within 5 miles of a body of water and/or a pool area.

NOTE: Maintenance is required to extend the life of your window system and to maintain the Euro-Wall Warranty