



VISTA PIVOT™ INSTALLATION GUIDE

MANUFACTURING

2200 Murphy Court
North Port, Florida 34289
888.989.3876 • 941.979.5316

888.989.EURO (3876)
www.euro-wall.com

SHOWROOM

1211 Stirling Road, Unit 102,
Dania Beach, Florida 33004

Finished floor must be installed prior to pivot door installation. However, if flooring is not able to be installed prior to pivot installation, a temporary substrate (wood bucking or starboard) can be utilized to install the pivot cup. The issue with not having the finished flooring installed is the panel will have to be removed when the finished flooring is installed to properly drill the bottom pivot cup. If your project has a sidelight with a mullion, leave the floor unfinished at the mullion clip location only, to allow for mullion clip to be properly secured and installed before being covered by the finished floor.

Important

Before beginning the install, read the instructions in their entirety. Perform install using the recommended methods contained within this guide. Deviating from recommended install procedures could impair functionality and could void any warranty.

Caution

It is the obligation of the building owner, contractor, architect or installer to ensure that door systems being installed comply with all building codes and regulations pertaining to the install location. Euro-Wall Systems, Inc. assumes no responsibility for failure to meet applicable laws, ordinances, building codes, etc.

Description of Supplied Parts

Upon delivery please inspect for any noticeable damage and check supplied materials with included packing list. If there is any damage and / or any missing components, please contact Euro-Wall as soon as possible. For installs with multiple opening units, do not mix and match any components even if the units are the same dimensions.

Protection of Unit During Construction

It is important that during the construction phase the door system components are protected and covered in a clean dry location away from any factors that could cause damage. Door systems that are stored during the construction phase can often times be exposed to situations that can cause permanent damage such as cement splatter, tar, paint, weld spray, falling objects, construction dust, sandblasting, etc. After installation of the door system is completed and construction is still

being performed, ensure that the large opening where the door system is installed does not become a major in and out access point for contractors and subcontractors. Damage done during the construction phase can be irreparable and can cause significant setbacks with new panels needing to be constructed.

Panel Protective Film

If your project comes with protective film, remove all protective film from panels, frames and any other metal extrusion within 30 days of job delivery. Failure to do so could cause finish damage voiding the product warranty.

Considerations Before You Get Started

Space: Make sure there is an appropriate amount of working space in and around the install opening. It is best practice to assemble the frame on top of saw horses (using at least four, one for each corner), therefore, make sure there is adequate room to assemble the frame in the area around the opening. Additionally, leave plenty of room without clutter to maneuver panels during install.

Power: Ideally power should be connected and accessible for tool operation and to ensure optimal lighting conditions for the install.

Moving Panels: Never “walk panels” and never try to move panels with only one person. Always lift and move panels by hand or using glass suction cups using at least two people. For installs less than 8’ in height, use a minimum of two installers. For panels over 8’ tall, a team of four is recommend for the install.

A. Tools Required

Step A.1 - Tools Checklist

Please make sure you have all of the required tools listed below before performing the install.

- | | | |
|---|--------------------------------------|--|
| ✓ Copy of install guide | ✓ Rubber mallet | ✓ Utility knife |
| ✓ Screw guns and chargers | ✓ SDS drill | ✓ Tape measure |
| ✓ Extension bits Phillips #2 / #3 for tapcons | ✓ Laser level | ✓ Saw horses (min 4) |
| ✓ 3/16", 1/2", and 1" drill bits for steel, concrete and wood | ✓ Dot / plumb laser level | ✓ Glass cups for moving panels (min 4) |
| ✓ 3/4" drill bit | ✓ 2', 4' and 6' levels | ✓ Shop-Vac |
| ✓ 1/4" drill bit | ✓ Pencil | ✓ Broom / dustpan |
| ✓ Hand screwdrivers (Phillips #2 and #3) | ✓ Chalk line | ✓ Garbage can / garbage bags |
| | ✓ String line (for measuring square) | ✓ 5mm allen key |
| | ✓ Snips | ✓ Protective eyewear |

Step A.2 - Disposables Checklist

Please make sure you have all of the required tools listed below before performing the install.

- | | | |
|---|--------------------------|-------------------------------------|
| ✓ Tapcons (if drilling into concrete) | ✓ Lubricant / wax | ✓ Paper towels |
| ✓ Screws for installing frame into substrate (supplied) | ✓ Shims | ✓ Cardboard / moving blankets |
| ✓ 100% Silicone | ✓ Windex / glass cleaner | ✓ Four 2x4's for panel installation |
| | ✓ Clean rags | |

Step A.3 - Labor Checklist

Please make sure you have the adequate number of installers

- | | |
|---|--|
| ✓ For installations with panels under 8 feet, recommended minimum of 2 installers | ✓ For installations with panels over 8 feet, recommended minimum of 4 installers |
|---|--|

NOTE: All Interior wood clad veneer products should be properly finished or sealed within 36 hours of delivery or stored in a climate controlled space until it can be properly finished or sealed.


B. Parts / Pieces Included

Below you will find a summary of the parts and pieces that are included with the door system. For a comprehensive checklist please see the packing list included with your order.

Step B.1 - Frame Checklist

- ✓ Jambs (2) (E0045) (**See Figure B.1**)
- ✓ Header (1) (E0045 & E0081) (**See Figure B.1**)
- ✓ Frame weatherstripping (C0114) (**See Figure B.2**)
- ✓ Channel sill (E0108) (if using optional water management kit)
- ✓ Water management kit (C0035) (optional)

FIGURE B.1: JAMBS & HEADER

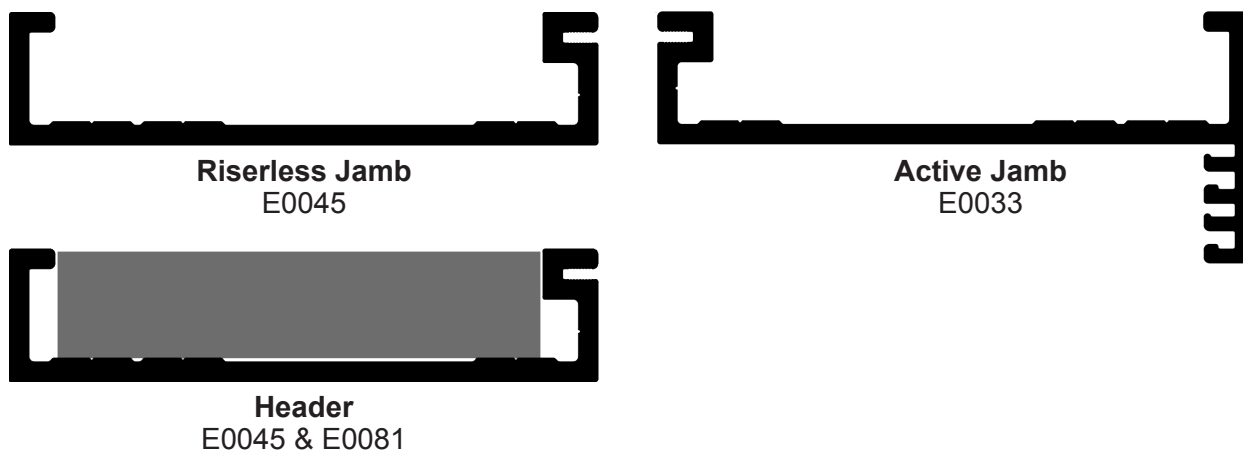


Step B.2 - Panel Checklist

Each system comes with a designated hardware box for each panel allocated in the work order. Each door panel must be installed using the corresponding hardware box.


- ✓ Panels (number designated by work order)
- ✓ Panel weatherstripping large (C0112) - see **Figure B.1** to distinguish between the two different weatherstripping types

FIGURE B.2: PANEL WEATHERSTRIPPING PROFILES

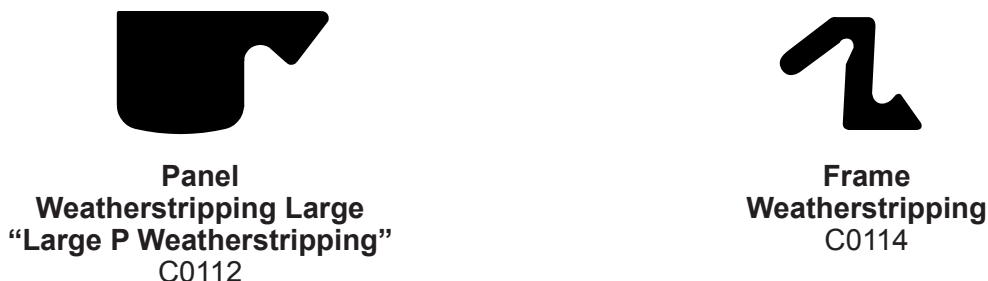

Step B.3 - Hardware / Handles Checklist


NOTE: The hardware included with your install package will vary depending on the install configuration. Please check your parts packing list for the hardware specifications for this installation.



C0210

Shootbolt / Pivot Cups

Ladder Pull - Quantity: 5
Multipoint Handle - Quantity: 3



C0077

Modified Shootbolt Cups

Panel w/ Ladder Pull - Quantity: 0
Panel w/ Multipoint Handle - Quantity: 2



C0033

1/2" Hole Plugs

Quantity varies



C0207

Top Pivot Pin

Quantity: 1



C0209

Bottom Pivot Pin


Quantity: 1



C0061

Removable Twin Point Lever

Quantity: 1



Multipoint Handle (if applicable)


LORI: C0064
ROLI: C0096



C0136

Anchor Screw


All screws for jamb and header are provided



C0206

Set Screw


Quantity varies



C0133


Frame Screw

Quantity varies



Matching Key to Cylinder Lock

Quantity: 2



C0212

14mm/15mm Wrench

Quantity: 1



C0035


Water Management Kit (If applicable)

C. Opening Preparation

Step C.1 - Measure, Level, Square & Clean

- ✓ Measure opening at least 3 points (See **Figure C.1**) to check for plumb, square and level of the opening
- ✓ Vacuum / sweep opening to be clear of dust / dirt / debris
- ✓ Ensure that there is less than 3/16" max deflection at the header

FIGURE C1: MEASURING THE OPENING

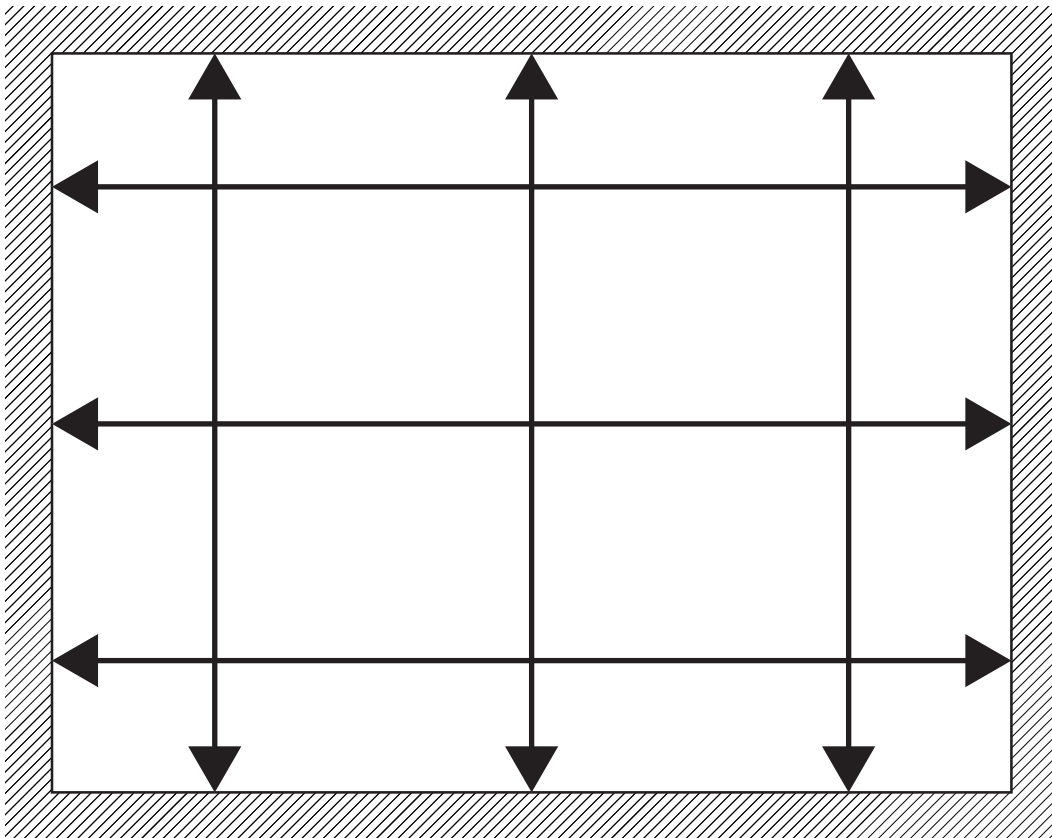


QR CODE: VIEW VIDEO INSTRUCTIONS ON MEASURING THE OPENING



Step C.2 - Swing Orientations


Left Hand Outswing

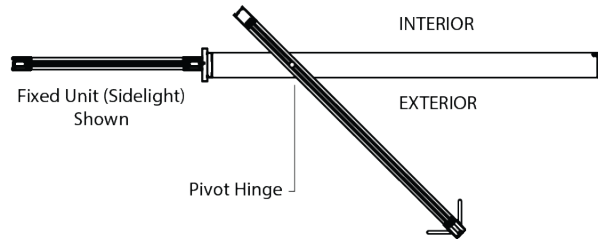


Jamb Orientation




Left Hand Inswing

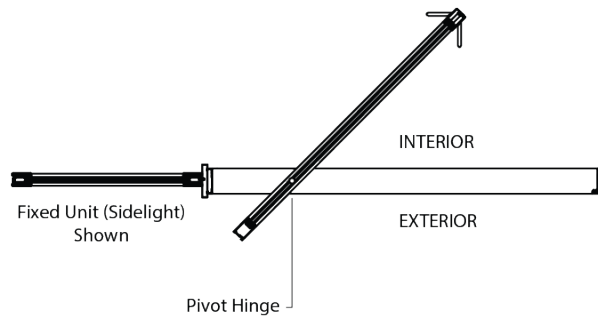

Right Hand Outswing

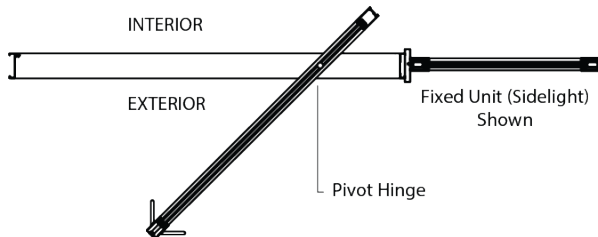

Right Hand Inswing

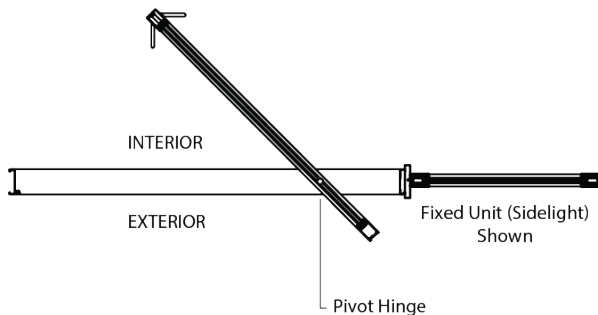

D. Frame Assembly


Step D.1 - Connect Jambs (E0033) to Header (E0045)

Place the frame as it will be assembled on 4 sawhorses near the opening. Sawhorses should be padded / wrapped to protect the frame from scratches or damage. DO NOT ASSEMBLE FRAME ON THE GROUND. Line the top of the jamb (E0033) edge with silicone. Turn the header (E0045) and jamb on their sides to connect them. Install two provided frame screws (C00133) on each jamb to connect to header.

QR CODE: FRAME ASSEMBLY




**CONFIGURATION:
LADDER PULL W/ A RIGHT HAND OUTSWING
A-E DENOTES SHOOTBOLT CUP LOCATIONS**

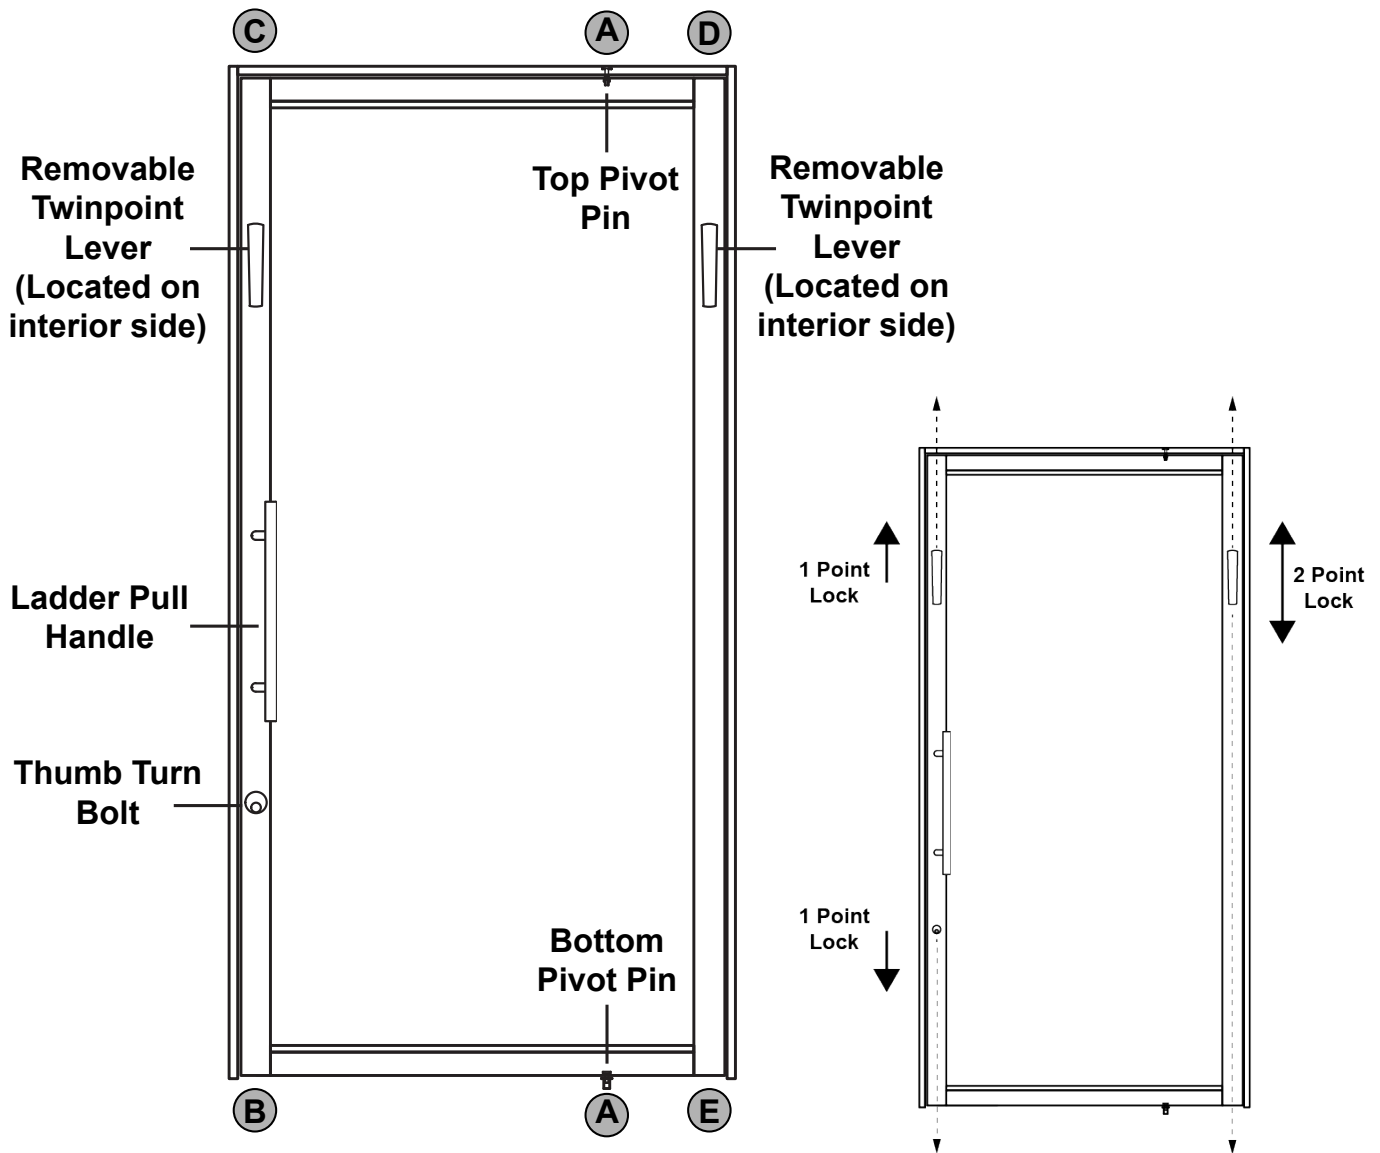


(EXTERIOR VIEW)

**CONFIGURATION:
MULTIPOINT W/ A RIGHT HAND OUTSWING
A-E DENOTES SHOOTBOLT CUP LOCATIONS**

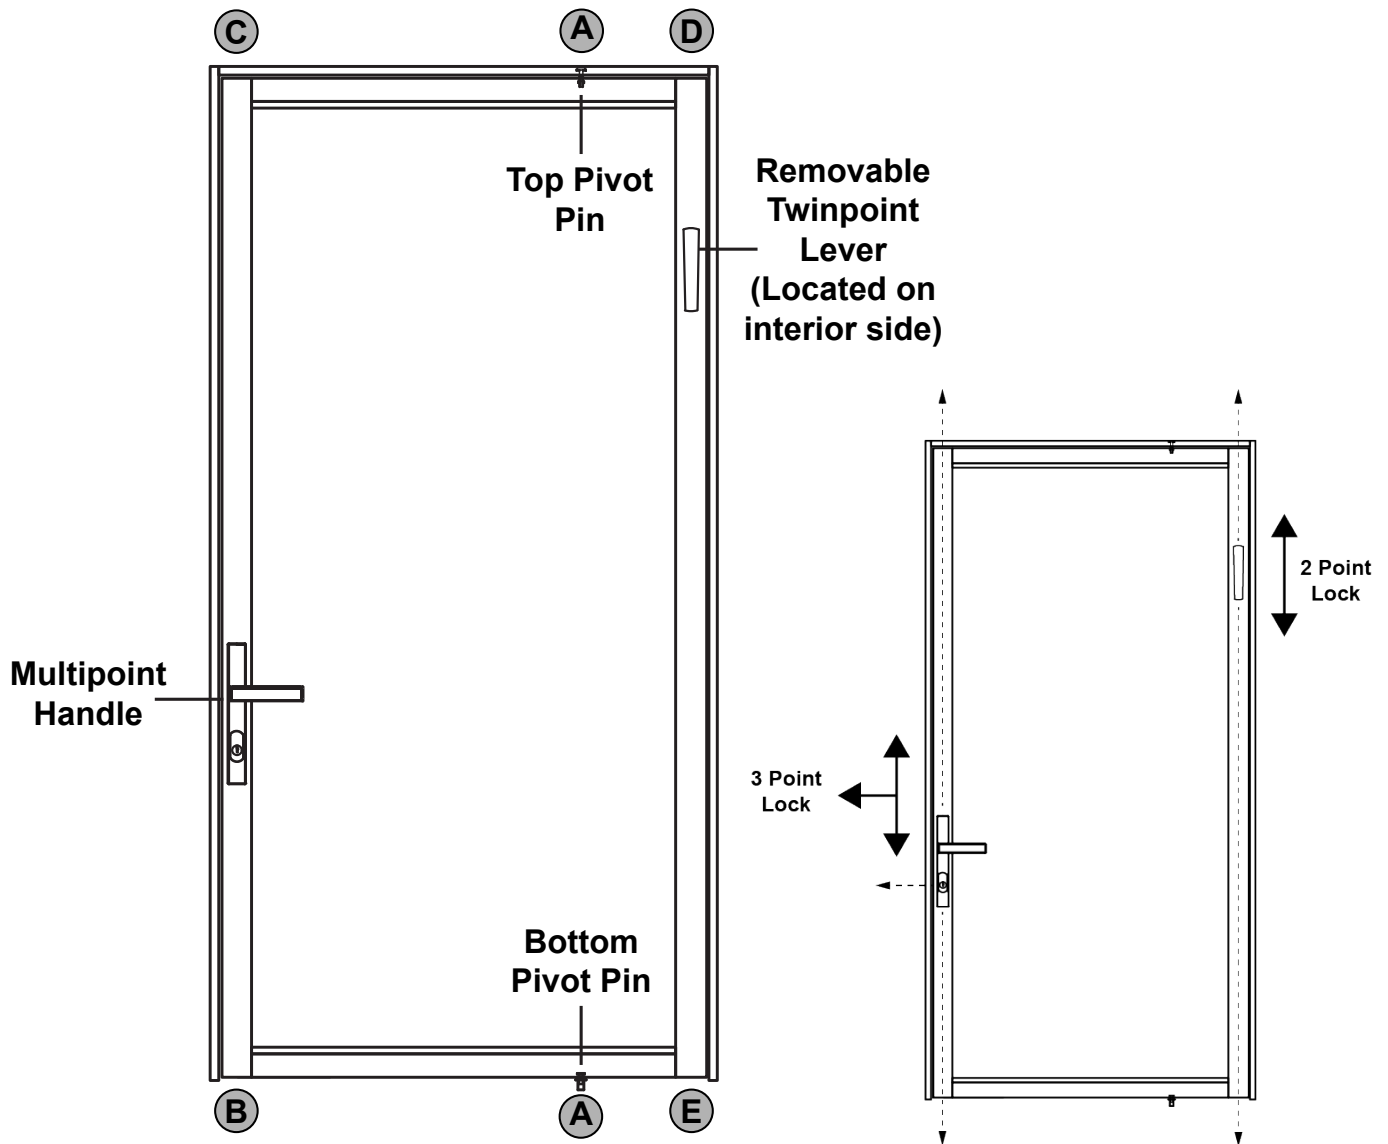


(EXTERIOR VIEW)

**CONFIGURATION:
LADDER PULL W/ A LEFT HAND OUTSWING
A-E DENOTES SHOOTBOLT CUP LOCATIONS**

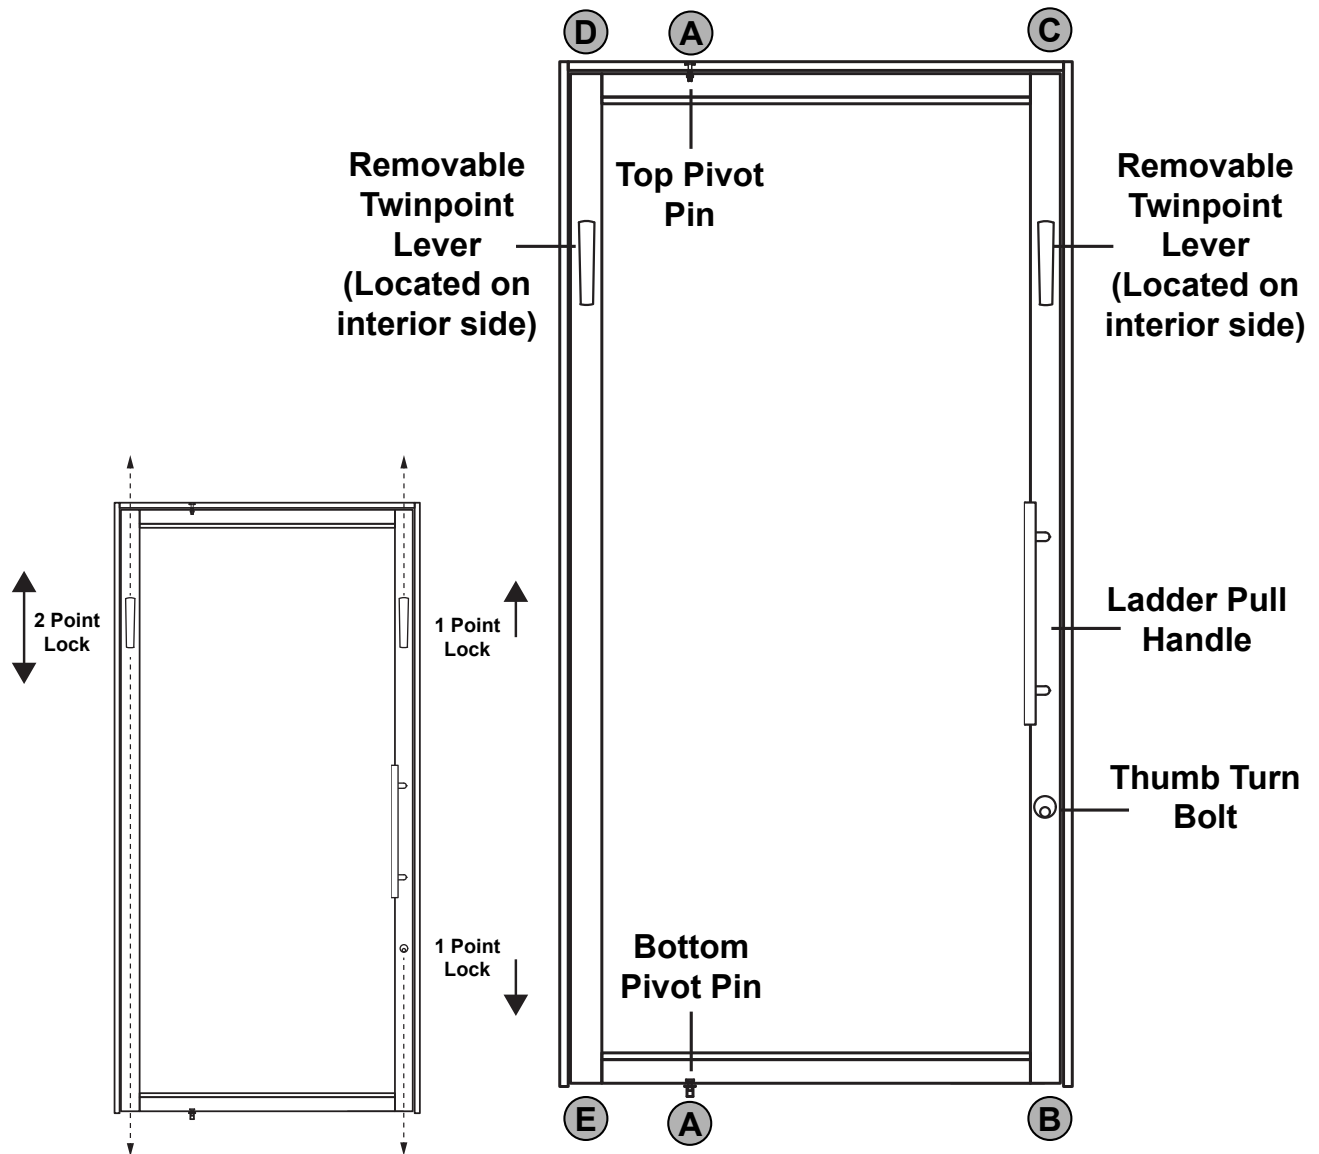

(EXTERIOR VIEW)

**CONFIGURATION:
MULTIPOINT W/ A LEFT HAND OUTSWING
A-E DENOTES SHOOTBOLT CUP LOCATIONS**

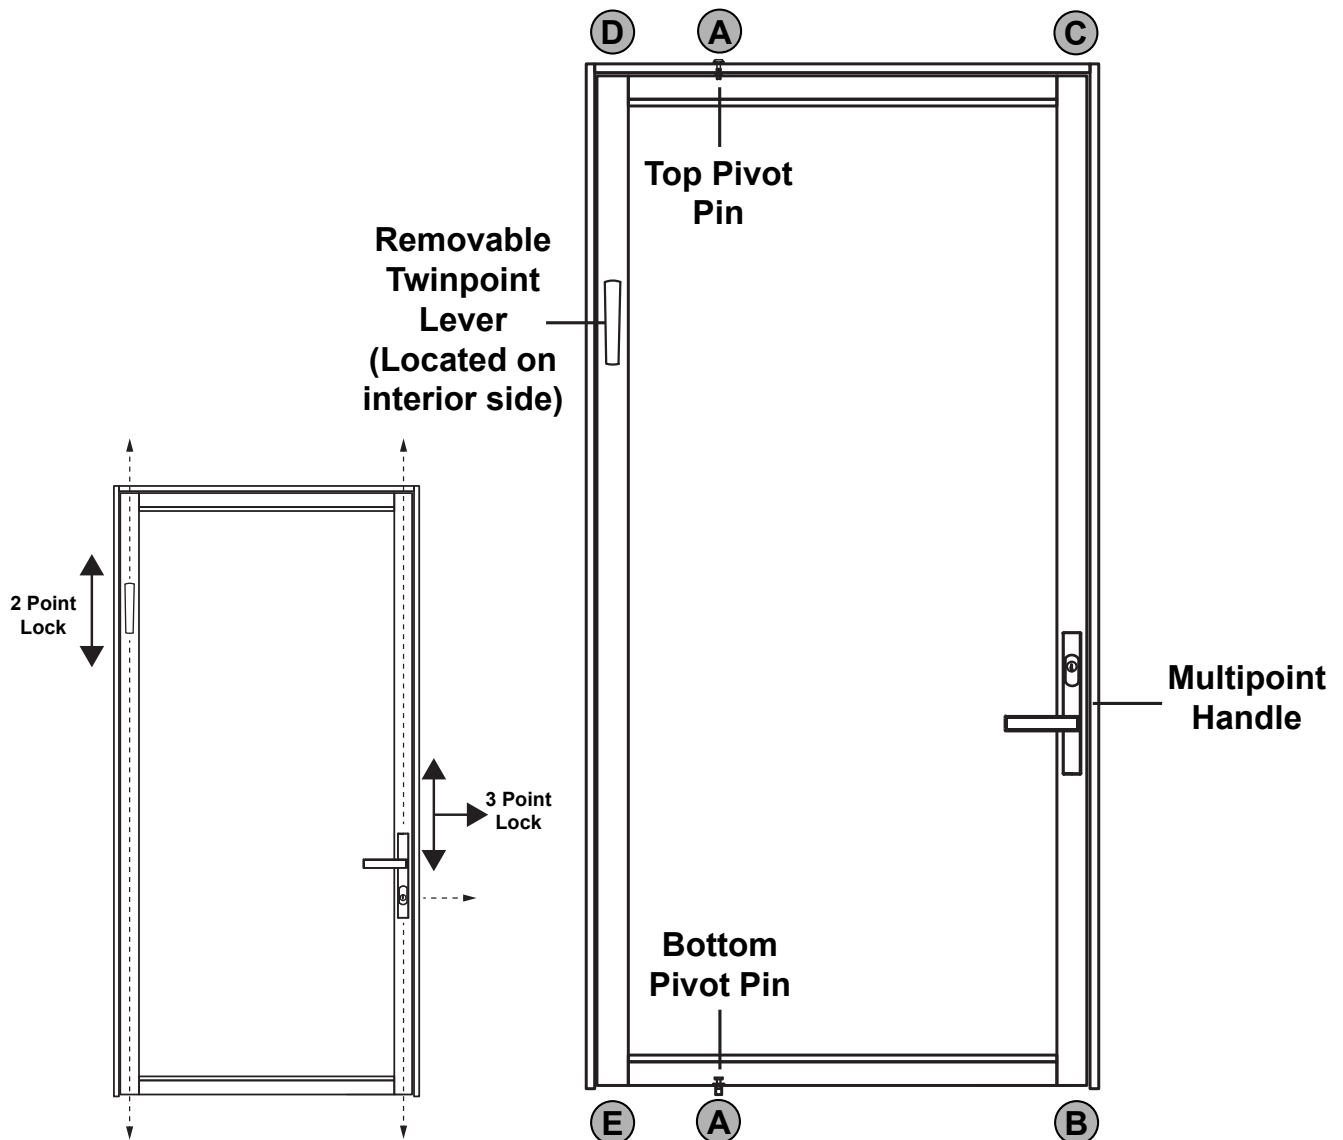

(EXTERIOR VIEW)

E. Dry Fit Frame

Step E.1 - Mark Top Pivot Pin (C0207) Location

Move the frame into the opening. Check the jambs and header to make sure they are plumb, square and level. Reveal should be equal on both sides of the header (E0045 & E0081). Mark the top pivot pin (C0207) location. Remove frame from opening.

**QR CODE: DRY FIT
FRAME & MARK TOP
PIVOT PIN LOCATION**



Note: The video refers to dry fitting the frame next to a transom, however if the configuration doesn't have a transom these steps are the same with any substrate.



F. Drill Top Pivot Pin Location

Step F.1 - Drill Top Pivot Pin Location

With any drilling done, make sure the appropriate PPE is used. Start by predrilling the top pivot pin location with a 3/16" bit. Then move up to using a 1" bit. The type of bit that used is dependant upon the substrate. (If the substrate is wood, use a 1" wood bit. If the substrate is steel, use a 1" steel bit. If the substrate is concrete, use a 1" SDS bit.) After the 1" hole is drilled, verify that the top pivot pin fits all the way flush into the hole. When the panel is moved into the opening, the pivot pin will be installed in the header (E0045 & E0081) and will need to be pushed up into this hole.

**QR CODE: DRILL TOP
PIVOT PIN LOCATION**



G. Install Frame

Step G.1 - Install Top Pivot Pin (C0207)

Place the top pivot pin (C0207) into the header (E0045 & E0081). Move the frame into the opening. Once the frame is in the correct spot, the pivot pin should easily push up into the drilled hole.

**QR CODE: INSTALL
TOP PIVOT PIN**



Step G.2 - Attach Frame to Opening

Square, level and plumb the frame to the substrate. Predrill in all the locations (for all substrate conditions) along the jambs (E0033 & E0045) and header (E0045 & E0081) using a 3/16" drill bit. Install 1/4" screws (supplied) in all the predrilled locations, connecting the pivot jambs and header to the substrate.

**QR CODE: ATTACH
FRAME TO OPENING**




Note: The video refers to attaching the frame to a transom, however if the configuration doesn't have a transom these steps are the same with any substrate.

H. Install Pivot Cup A (C0210)


Step H.1 - Mark Pivot Cup A Location

Make sure the top pivot pin (C0207) is hanging straight down. Plumb using a dot/plumb laser level, mark the bottom pivot pin location using the top pivot bolt as the reference point. Take a 3/4" bit and place it on the ground where the laser is pointing to. Trace around the bit with a pencil to mark the drill location for pivot cup A.

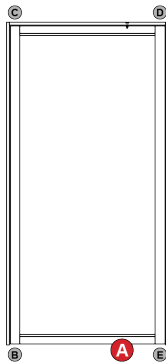

Exterior View

**QR CODE:
MARK PIVOT
PIN CUP A
LOCATION**

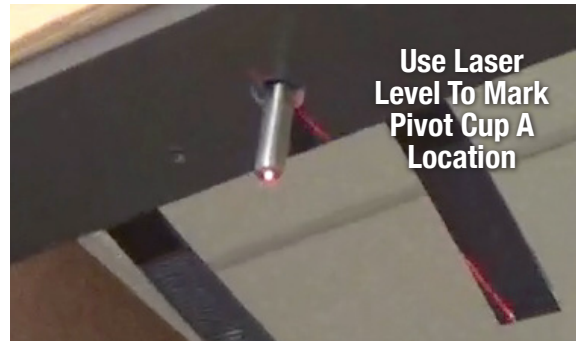

Step H.2 - Drill Pivot Cup A Location

Using a 3/4" drill bit, drill out the bottom pivot cup (C0209) A location to a depth of 1-1/4". The type of 3/4" drill bit used is dependent on the substrate.

**QR CODE: DRILL PIVOT
CUP A LOCATION**



Step H.3 - Install Pivot Cup A (C0210)

Check to verify that the pivot cup (C0210) sits flush into the drilled hole. Predrill out pivot cup A location with a 3/16" SDS. Secure pivot cup A with 1/4" tapcon screw.

**QR CODE: INSTALL
BOTTOM PIVOT CUP A**



I. Install Panel

Step I.1 - Secure Top Pivot Pin (C0207)

Before placing the panel in the opening, use painters / masking tape to push the top pivot pin up into the header to keep it out of the way as the panel is installed.

QR CODE: SECURE TOP PIVOT PIN



Step I.2 - Preparation for Panel Install

Place 2x4's or other wood that is at least 1-1/2" thick by the opening for the panel to rest on. The bottom pivot pin (C0209) sticks out a little over 1". The bottom pivot pin should never make contact with the ground; this could damage the pin and/or the panel.

QR CODE: PREPARATION FOR PANEL INSTALL



Step I.3 - Move Panel Onto Wood

Use a minimum of 2-4 people to move the panel onto the pieces of wood. Do not let the bottom pivot pin (C0209) come in contact with the ground. Once in place, push the panel into the upright position.

QR CODE: MOVE PANEL ONTO WOOD



Step I.4 - Insert Bottom Pivot Pin (C0209)

Attach glass cups onto the panel. Lift panel up and guide the bottom pivot pin (C0209) into the bottom pivot pin cup.

QR CODE: INSERT BOTTOM PIVOT PIN INTO LOCATION A



Step I.5 - Shim the Panel

Shim the bottom of the panel so you have equal gapping between the panel - header and the panel - floor. Make sure the top pivot is aligned with the pivot location on the panel.

QR CODE: SHIM THE PANEL






Step I.6 - Securing the Panel

Remove the 5mm allen set screw on the interior of the top rail and remove the blue tape covering the top pivot pin (C0207). The top pivot pin should fall into place into the top rail. Use a double ended 14mm/15mm wrench (C0212) to thread top pivot pin into panel. Use the 15mm end of the wrench for the first half of threading the pivot pin. Use the 14mm end of the wrench for threading the second half of the pivot pin. **(See Figure I.6)** Continue to thread until there is an even 3/8" gap at the top and bottom of the panel. Use the allen key to secure/tighten the 5mm allen set screw into the panel on the flat side of

**QR CODE:
SECURING
THE PANEL**




FIGURE I.6

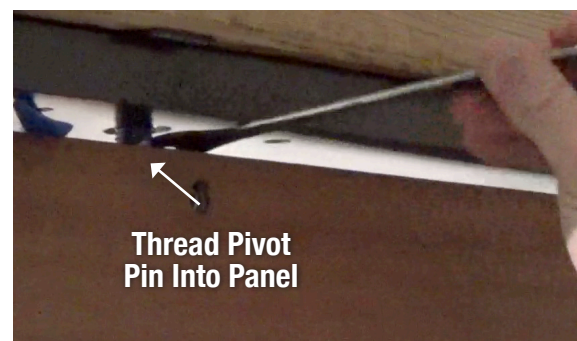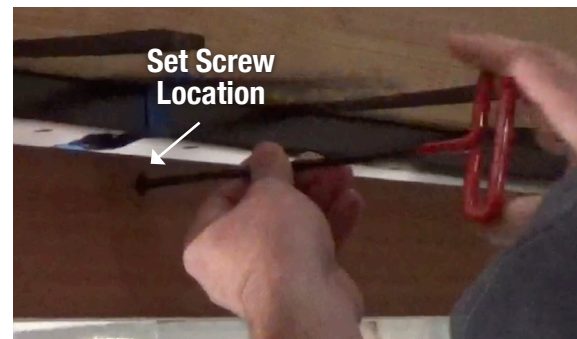

Step I.7 - Test Opening Panel

Test operation by slowly opening the panel to make sure there's no rubbing issues on any side of the panel.

QR CODE: TEST OPENING PANEL

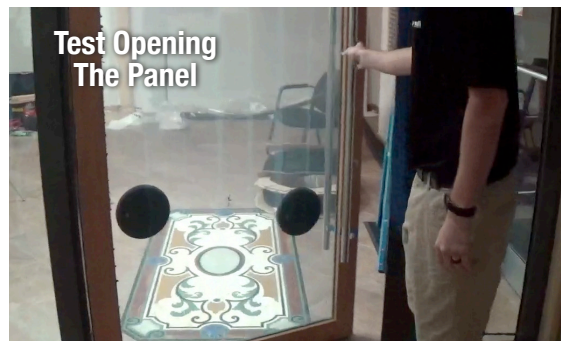

J. Frame Weatherstripping

Step J.1 - Install Frame Weatherstripping (C0114)

Install frame weatherstripping (C0114) on the jamb (E0033) with the riser. The door needs to have the correct spacing before installing the bottom shootbolt cup (C0210 or C0077). The weatherstripping pushes into the groove all the way down the jamb.

QR CODE: INSTALL FRAME WEATHERSTRIPPING




K. Install Shootbolt Cup B

If panel uses a multipoint handle, use a modified shootbolt cup (C0077) for shootbolt cup B.



Step K.1 - Mark Shootbolt Cup B (C0210 or C0077) Location

(See Figure E.1) Place several layers of painters / masking tape on the flooring substrate at the shootbolt B (C0210 or C0077) location. Close the door, compress it against the jamb and make sure the latch from the thumb bolt (C0201) / multipoint handle (E0064/E0096) (See Figure K.1) lines up with strike plate. Lock and unlock the door several times to engage the shootbolt leaving an indent in the blue tape, marking the spot for the shootbolt B cup.

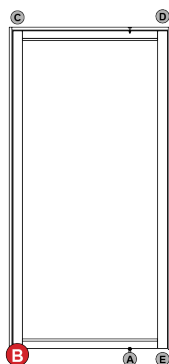

Exterior View


QR CODE: MARK SHOOTBOLT CUP B LOCATION

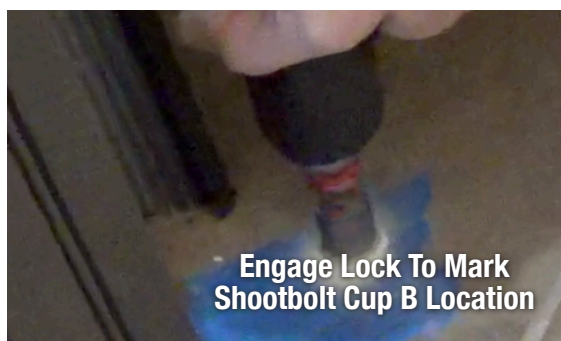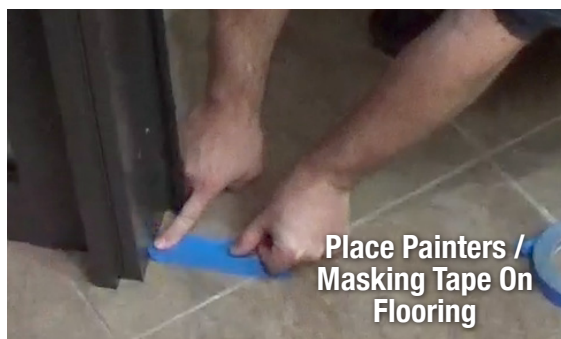


FIGURED K.1: MULTIPOINT HANDLE (E0064 / E0096) OPERATION INSTRUCTIONS

Unlock: To unlock and open, turn the thumb bolt (if applicable) to the unlock position until it cannot rotate any further and turn the handle fully down - this will disengage the multipoint lock, allowing the door to open.


Lock: Prior to engaging the thumb bolt (if applicable), turn the handle up roughly 45° (see illustration below) to engage the locking points. After the locking mechanism is engaged, release the handle and let it move back down to the normal position. Lock the thumb bolt lock by rotating it until locked and cannot rotate any further (if applicable).



Normal Position



Unlocking



Engaging / Locking

**QR CODE: MULTIPOINT
HANDLE OPERATION**



Step K.2 - Drill Shootbolt Cup B (C0210 or C0077) Location

Drill out the shootbolt cup B (C0210 or C0077) location where the painters/masking tape is indented using a 3/4" appropriate substrate bit.




**Drill
Shootbolt
Cup B
Location**

Step K.3 - Install Shootbolt Cup B (C0210 or C0077)

Insert the shootbolt cup (C0210 or C0077) into the drilled hole. Drill out the shootbolt cup B with 3/16" SDS and anchor in place using a 1/4" tapcon screw.




Shootbolt / Pivot Cup
C0210



This cup will be used for cups B & C if your door has a ladder pull handle.

Modified Shootbolt Cup
C0077



This cup will be used for cups B & C if your door has a multipoint handle.

Step K.4 - Test Shootbolt Cup B (C0210 or C0077)

Close the door and turn the thumb bolt lock (C0201) or multipoint handle lock (C0064 / C0096) to engage the shootbolt. Test to ensure the shootbolt goes into shootbolt cup B (C0210 or C0077).

**QR CODE: TEST
SHOOTBOLT CUP B**



L. Panel Weatherstripping

Step L.1 - Install Panel Weatherstripping

Insert the panel weatherstripping (C0112) into the grooves along the side of the stile that closes against the riserless jamb (E0045). When the door closes the weatherstripping should compress securely. The weatherstripping pushes into the groove along the jamb.



Panel
Weatherstripping Large
"Large P Weatherstripping"
C0112

QR CODE: INSTALL PANEL
WEATHERSTRIPPING




M. Install Shootbolt Cup C

If panel uses a multipoint handle, use a modified shootbolt cup (C0077) for shootbolt cup C.

Step M.1 - Mark Shootbolt Cup C (C0210 or C0077) Location

(See Figure E.1) Place several layer of painters/ masking tape on the shootbolt cup C (C0210 or C0077) location. If your door has a ladder pull handle, engage the removable twinpoint lever (C0061) several times to make indents in the blue tape, marking the shootbolt cup C location. Insert the removable twinpoint lever horizontally then turn it to engage it. (See Step P) If your door has a multipoint handle, engage the the handle several times to make indents in the painters/masking tape, marking the shootbolt cup C location. (See Figure K.1)

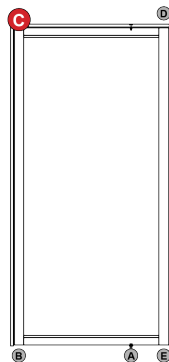

Exterior View

QR CODE: MARK
SHOOTBOLT CUP
C LOCATION



Step M.2 - Drill Shootbolt Cup C Location

Drill out the shootbolt cup C (C0210) location where the painters/masking tape is indented. Start using a 1/4" bit, then a 1/2" bit and work up to using a 3/4" steel bit. Use an appropriate bit for the substrate for the rest of the header.




Step M.3 - Install Shootbolt Cup C

Insert the shootbolt cup (C0210 or C0077) into the drilled hole. Use the appropriate screw for the substrate. If drilling into concrete, predrill the shootbolt cup 1/4" to accommodate the tapcon. Drill out the shootbolt cup C with 3/16" SDS and screw in a 1/4" tapcon screw.



Step M.4 - Test Shootbolt Cup C

Close the door and test to make sure the shootbolt goes into the shootbolt cup C (C0210 or C0077).

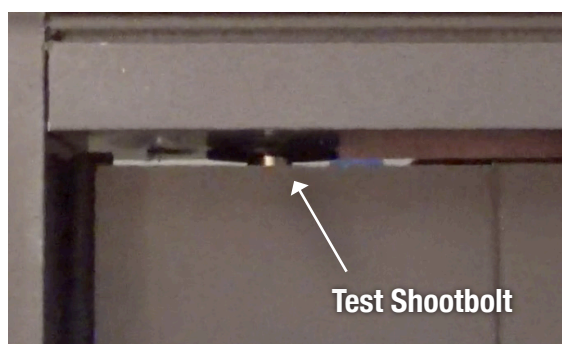

N. Install Shootbolt Cup D


Step N.1 - Mark, Drill & Install Shootbolt Cup D (C0210)

(See Figure E.1) Repeat steps M.1-M.4 for the installation of shootbolt cup D (C0210). Insert and engage the removable twinpoint lever to make the indents on the painters/masking tape. Insert the removable twinpoint lever (C0061) horizontally then turn it 90° clockwise to engage it. (See Step P)



Install
Shootbolt
Cup D

QR CODE:
INSTALL
SHOOTBOLT
CUP D

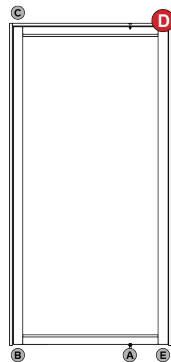

Exterior View

O. Install Shootbolt Cup E


Step O.1 - Mark, Drill & Install Shootbolt Cup E (C0210)

(See Figure E.1) Repeat steps K.1-K.4 for the installation of shootbolt cup E (C0210). Insert and engage the removable twinpoint lever (C0061) to make the indents on the painters/masking tape. Insert the removable twinpoint lever horizontally then turn it 90° clockwise to engage it. (See Step P)



Install
Shootbolt
Cup E

QR CODE:
INSTALL
SHOOTBOLT
CUP E

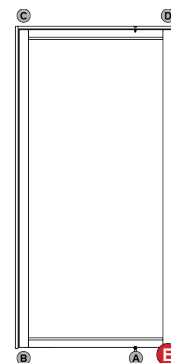


Exterior View

P. Removable Twinpoint Lever


Step P.1 - Removable Twinpoint Lever (C0061) Usage

Twinpoint levers (C0061) are used during inclement weather and offer the security of a top and bottom locking shootbolt. Remove the two plugs (C0033) on the interior side of the panel located near the top of the stiles. To engage and lock the twinpoints make sure the lever is turned completely down into the locked position. The configuration will determine which direction the twinpoint lever must turn to unlock. To disengage and unlock the twinpoint turn the lever roughly 90°, towards the center of the panel.

QR CODE: REMOVABLE TWINPOINT LEVER



Unlocked Position



Unlocked Position




Locked Position

Q. Water Management System

Step Q.1 - Drain Installation

Install drain from the water management kit (C0035) to the channel sill (E0108) and locate on the interior of the panel location, making sure to align the center of the drainage channel to the inside edge of the panel. Ensure there are no kinks in the drain tube to allow for clear flow of water drainage. Make sure drainage tube flows to an adequate location away from the door location. In certain cases additional drainage tube may be needed based upon the drain location.

FIGURE Q.1

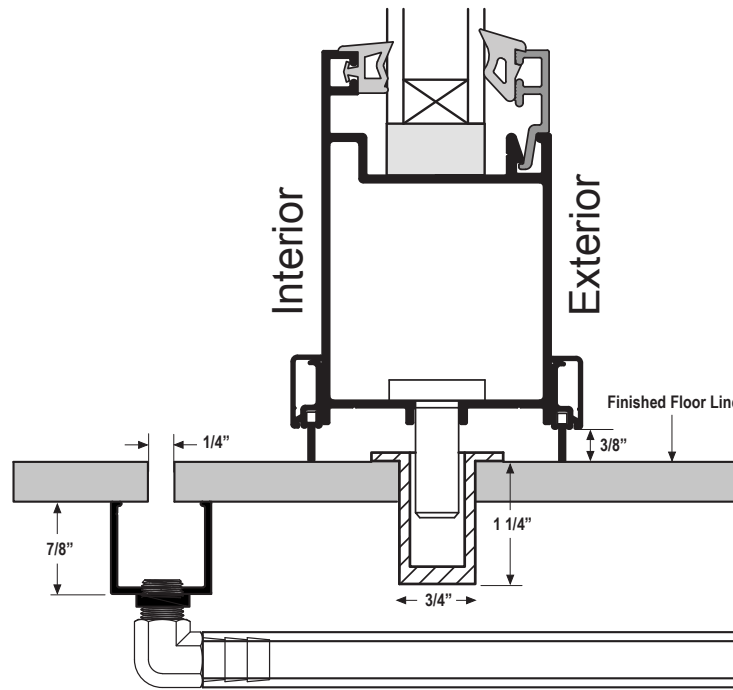

Step Q.2 - Secure Channel Sill (E0108)

Secure the channel sill (E0108) with the appropriate anchors for your substrate and allow for tile (or other floor covering) to cover the channel while leaving a 1/4" gap to allow the water to pass into the drainage system. Seal all screw penetrations and end of the channel with sealant.

Step Q.3 - Test Drainage System

Test drainage system to verify there are no leaks.

R. Maintenance & Care

Panel Protective Film

If your project comes with protective film, remove all protective film from panels, frames and any other metal extrusion within 30 days of job delivery. Failure to do so could cause finish damage voiding the product warranty.

Hinges

Wipe down the visible surfaces with warm soapy water on a soft cloth and then rinse off by wiping with a clean damp cloth. Spray a thin film of Boeshield T-9 (or other corrosion preventative spray such as CRC Marine 66, Inox or CorrosionX, or with machine oil) and wipe off any overspray or excess residual film with a soft cloth.

Locks and Hardware

Wipe down the visible surfaces with warm soapy water on a soft cloth and then rinse off by wiping with a clean damp cloth. Spray a thin film of Boeshield T-9 (or other corrosion preventative spray such as CRC Marine 66, Inox or CorrosionX, or with machine oil) on any exposed hardware, including but not limited to: handles, locking mechanisms, hinges, unpainted or uncoated metal components, brackets, bearings, exposed screws etc. Be careful to avoid overspray and be sure to wipe down any overspray that does occur. Take care to avoid spray onto wood components, as staining may occur. Use a soft cloth to buff out any excess residual film.

Track and Bearings

Apply white petroleum jelly (Vaseline) or equivalent, to inner lip of each side of head track with a clean cloth. Distribute lubricant evenly along track. Ensure wheels and bearings receive sufficient lubricant. Wipe all contaminant from track surfaces with damp cloth and mild detergent, clean surfaces with clean soft cloth. Apply thin film for systems installed in severe environments by wiping surfaces of track with anti-corrosive substance, such as, Boeshield T-9, CRC Marine 66®, Inox® or CorrosionX®.

Hangers, Pivots and Brackets

Before applying anti-corrosive substance, wipe exposed surfaces with clean soft cloth soaked in warm soapy water; then rinse, clean and dry. Spray thin film to hangers, pivots and brackets with anti-corrosive substance, such as, Boeshield T-9, CRC Marine 66®, Inox® or CorrosionX®.

Frequency

Regular maintenance is required for all hardware, even stainless steel, to keep manufacturer's warranty in place. Failure to provide proof of maintenance will void any warranty.

Carry out maintenance procedures with the following minimum recommendations:

- General environments - every 3 months
- Marine, industrial environments, within 5 miles of a body of water and / or a pool area - every month.
- Boeshield T-9 re-application: every 6 months for general environment, and up to every 3 months for marine/industrial environments, or within 5 miles of a body of water and/or a pool area.

Inclement Weather

Twinpoint levers are used during inclement weather and offer the security of a top and bottom locking shootbolt. Remove the two plugs on the interior side of the panel located near the top of the stiles. To engage and lock the twinpoints make sure the lever is turned completely down into the locked position. The configuration will determine which direction the twinpoint lever must turn to unlock. To disengage and unlock the twinpoint turn the lever roughly 90°, towards the center of the panel.

NOTE: Maintenance is required to extend the life of your door system and to maintain the Euro-Wall Warranty