

Vista Multi Slide™



IMPACT & NON-IMPACT RATED
Sliding Door System



#34003
VI. 102025




Enjoy the View



Vista Multi Slide™ stands out, whether you need strong impact ratings for hurricane regions or non-impact options for inland construction. When you combine the largest panel heights and widths with the smallest interlock sight line (less than 1"), you get bigger views, bigger support and bigger possibilities.

The massive, gliding panels open and close effortlessly thanks to the EZ Glide roller system. The sill can be embedded flush with the finished floor for a clean, seamless transition.

At Euro-Wall, everything we do is Superior by Design. We constantly push ourselves to provide the highest quality doors with the largest views to give you the freedom to design without limitations.

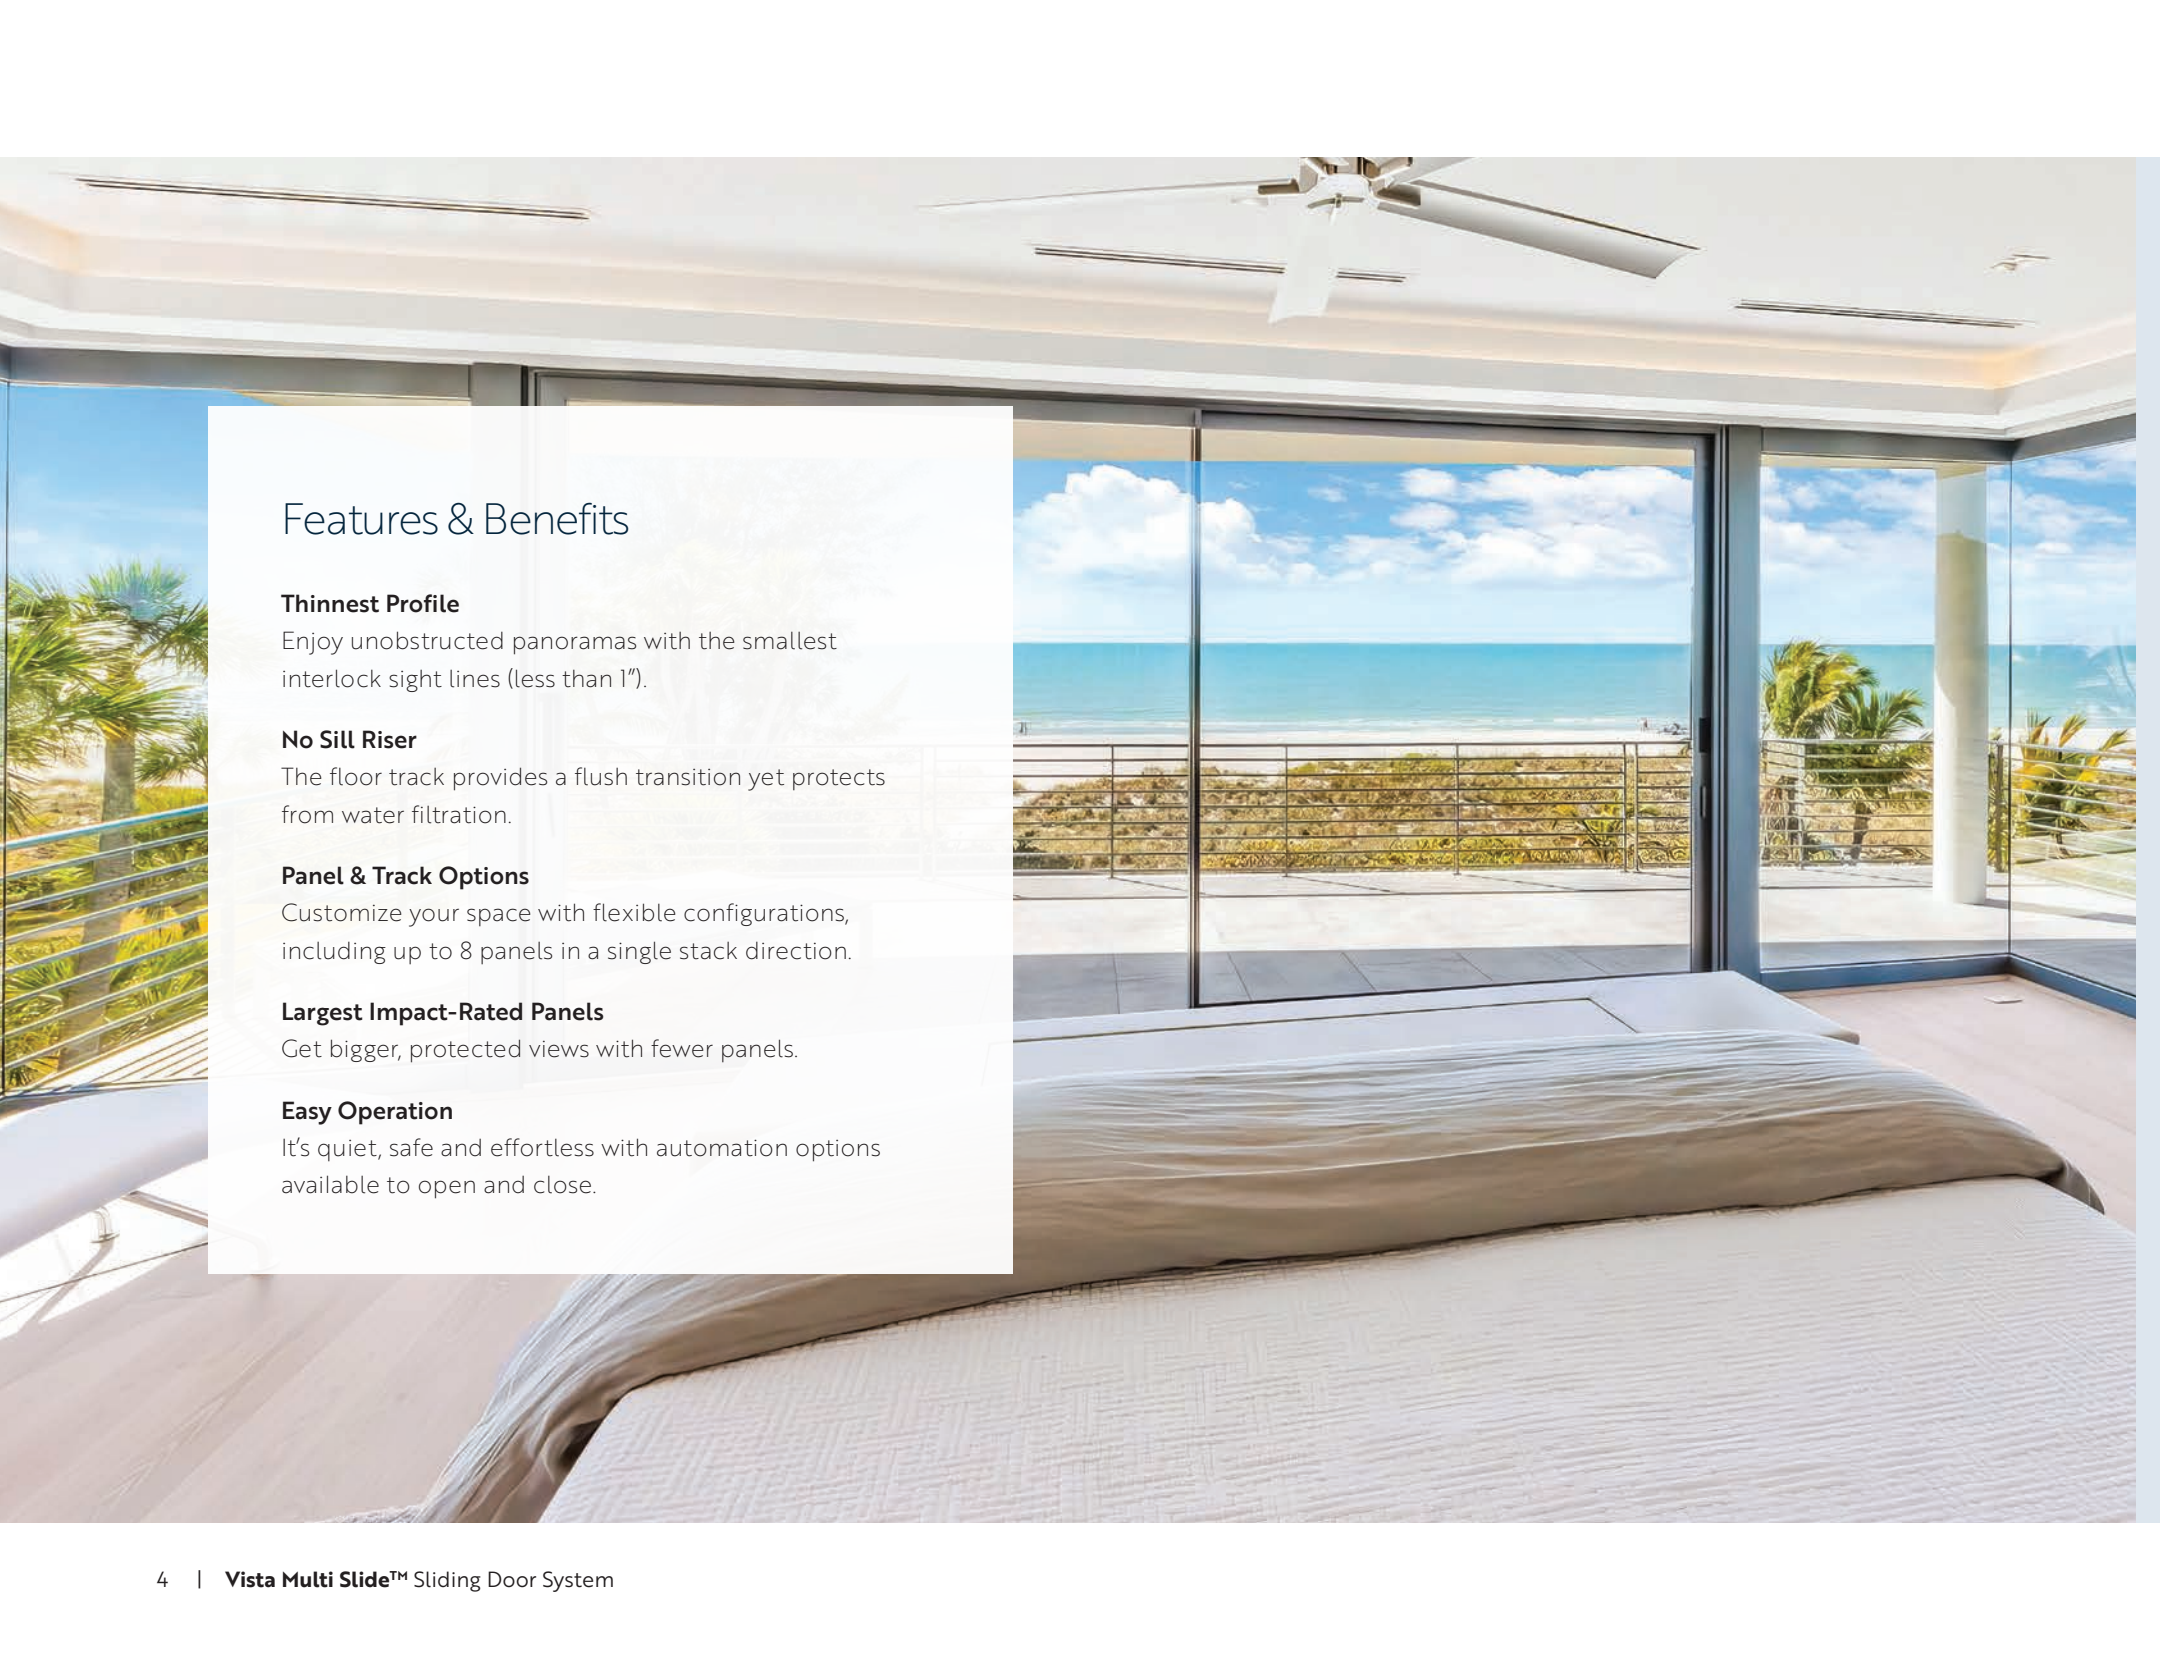

Features & Benefits

Thinnest Profile

Enjoy unobstructed panoramas with the smallest interlock sight lines (less than 1").

No Sill Riser

The floor track provides a flush transition yet protects from water filtration.

Panel & Track Options

Customize your space with flexible configurations, including up to 8 panels in a single stack direction.

Largest Impact-Rated Panels

Get bigger, protected views with fewer panels.

Easy Operation

It's quiet, safe and effortless with automation options available to open and close.

System Thresholds

MAXIMUM / MINIMUM SPECIFICATIONS



	IMPACT RATED	NON-IMPACT RATED
MAX. PANEL WEIGHT	800 lbs	800 lbs
MAX. PANEL HEIGHT	168"	180"
MAX. PANEL WIDTH	84"	96"
MIN. PANEL HEIGHT	32"	32"
MIN. PANEL WIDTH	24"	24"
INTERLOCK THICKNESS	15/16"	15/16"
MAX. # OF PANELS	8	8

Note: When using maximum panel widths & heights, panels may exceed maximum panel weight of 800 lbs. Calculated weight check should be done. For installations in Florida, please see the Florida Product Approval (#34003) for usage and limitations.



10-Year Limited Warranty

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years.

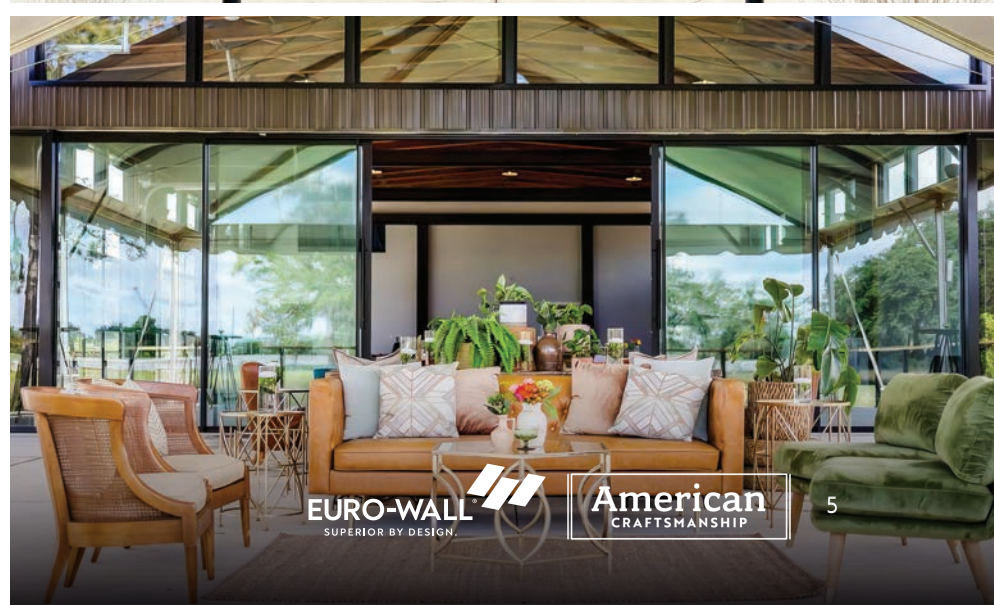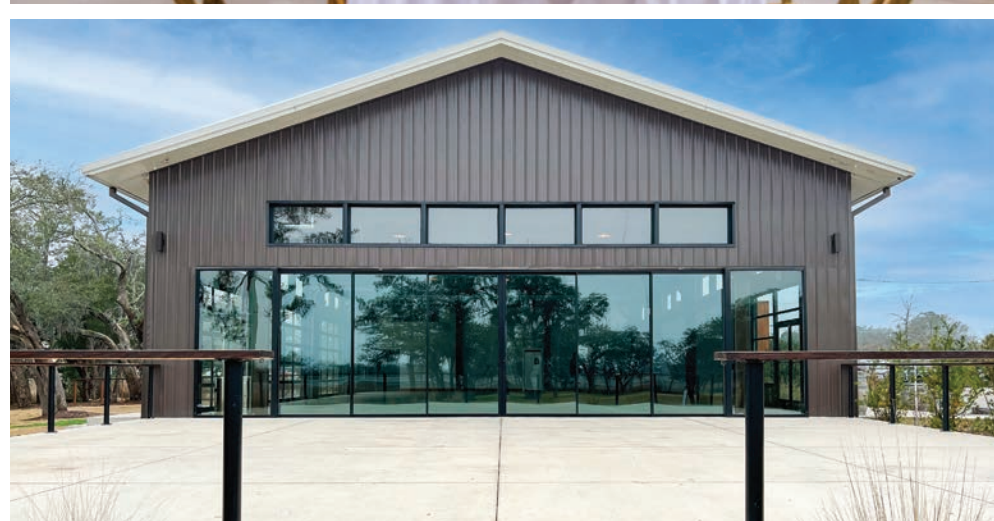

System Components

- 1 Less Than 1"
Interlock Sight Line

- 2 Recessed Pull
C0256

- 3 Locking Lever
C0061

- 4 Ladder Pull

- 5 Pawl & Catch Wheel
C0030 / C0031

- 6 Wheel Assembly
C0048


- 7 Adjustable Corner Key
C0029

- 8 Frame L Bracket
C0028



Embedded Track Details


The Vista Multi Slide™ sill / track can be fully embedded with a low-profile configuration. The hidden track option allows optimal threshold clearance and creates a clean, seamless interior / exterior sight line. *ADA sill is available for interior applications.

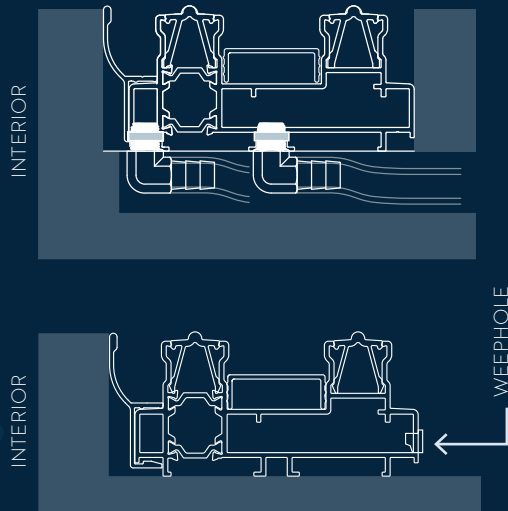

For weather challenged climates, the flush and low profile hidden track systems are manufactured to meet most water rating specifications without the need of a sill riser.

Less than 1" Sight Line Profile


The Vista Multi Slide™ interlock (where the panels join when the door system is closed) has a PROFILE WIDTH OF LESS THAN 1". This provides the largest uninterrupted view on the market for any impact-rated multi-slide door system.

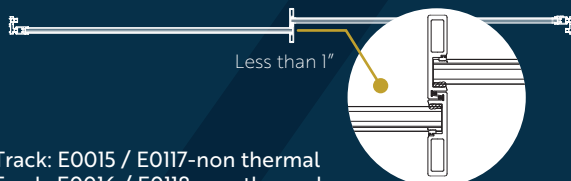

2-Track: E0015 / E0117-non thermal
3-Track: E0016 / E0118-non thermal
4 Track: E0018
5-Track: E0019

Finish Options

STANDARD FRAME & DOOR PANEL FINISHES

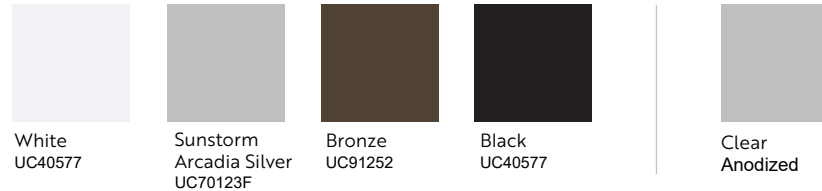

Standard finish is Kynar AAMA 2605

FRAME & DOOR PANEL FINISHES

- Kynar® Liquid Paint or Powder Coat finishes available
- Custom powder coat or Kynar® finishes available
- Custom faux woodgrain finishes available
- Custom handle options available

INTERIOR WOOD CLAD FINISH OPTION

- Mahogany / sapele
- White oak
- Additional wood species available



Wood clad veneer option shown

Hardware / Handle Finish Options

LADDER PULL



Ladder Pull Sizes
up to 8' Tall


Brushed Satin
Polished Stainless Steel
White
Bronze
Black

LOCKING LEVER




Sunstorm Arcadia Silver
Brushed Satin
White
Bronze
Black
Custom Colors Available

SILL / TRACK



Clear Anodized
Black Anodized
White
Bronze
Black
Sunstorm Arcadia Silver
Custom Colors Available

Note: The colors shown are an approximation of actual color and finish. Actual colors and finishes may vary slightly.

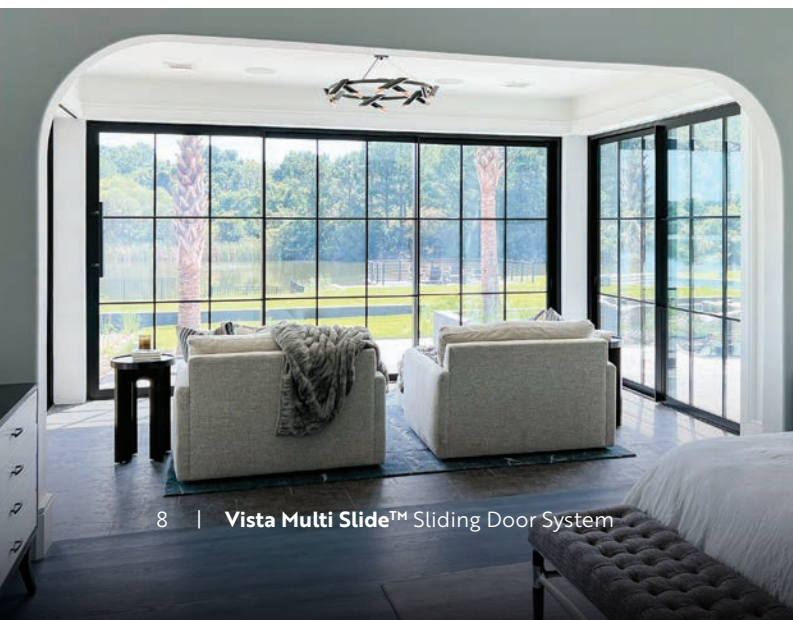



Note: These configurations are just a few examples of the numerous possibilities for Vista Multi Slide™ layout options. For installations in Florida, see the Florida Product Approval (#34003).

Configurations

Fixed Panel Active Panel

1 Fixed / 1 Active



2 Active



1 Fixed / 2 Active



2 Active / 1 Fixed



3 Active




4 Active




1 Fixed / 2 Active / 1 Fixed




1 Fixed / 3 Active



2 Fixed / 2 Active



5 Active



5 Active



2 Fixed / 3 Active



6 Active



1 Fixed / 4 Active / 1 Fixed



1 Fixed / 4 Active / 1 Fixed



1 Fixed / 5 Active / 1 Fixed



2 Fixed / 5 Active



1 Fixed / 6 Active / 1 Fixed



1 Fixed / 6 Active / 1 Fixed



1 Fixed / 6 Active / 1 Fixed




Specialty Configurations

POSTLESS CORNER

1 Fixed / 2 Active / 1 Fixed

Postless Corner Configuration:
This configuration is just one of many options and can be produced with up to 8 panels



There's more...One system, endless geometry: Vista Multi Slide adapts at split corners, such as a transition from 3 to 4 tracks, and delivers design flexibility with concave or convex corners.



Test Performance

IMPACT

Air Infiltration: ASTM E283-04
 Water Infiltration: ASTM E331-00
 Wind Load: TAS 202-94
 Large Missile Impact: TAS 201-94
 Cyclic Load: TAS 203-94
 Forced Entry: AAMA 1303-05



#34003

DESIGN PRESSURE CHARTS

HVHZ & Wind Zone 3

Unit Height	Unit Width															
	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	90
90	120	120	120	120	120	120	120	120	120	120	120	120	120	120	119	
92	120	120	120	120	120	120	120	120	120	120	120	120	120	115	119	
96	120	120	120	120	120	120	120	120	120	120	120	120	108	107	106	
100	120	120	120	120	120	120	120	120	120	120	120	103	101	100	99	
102	120	120	120	120	120	120	120	120	120	120	101	99	98	97	95	
104	120	120	120	120	120	120	120	120	120	120	98	96	95	94		
108	120	120	120	120	120	120	120	120	120	94.4	92.4	90.6	89			
112	120	120	120	120	120	120	120	120	91.8	89.5	87.5	85.7				
114	120	120	120	120	120	120	120	89.6	87.3	85.3	83.5					
116	120	120	120	120	120	120	120	89.9	87.4	85.1	83.1					
120	120	120	120	120	120	120	120	85.9	83.4	81.2	79.2					
124	120	120	120	120	117.8	112.6	84.9	82.5	79.7	77.5						
126	120	120	120	117.6	112	107.1	83.1	80.4	78							
128	120	120	118.1	112	106.6	84.4	81.4	78.8	76.4							
132	113.7	113.7	107.3	101.7	96.8	81.2	78.2	75.6								
136	103.7	103.7	97.8	92.7	81.3	78.1	75.3	72.7								
138	99.1	99.1	93.5	88.5	79.9	76.7	73.9									
140	94.8	94.8	89.4	84.7	78.5	75.3	72.5									
144	87.6	87.6	83.1	79.2	75.8	72.7	70									
150	79.8	79.8	75.2	71.1	67.6	64.4										
156	70.7	70.7	66.6	63	59.8											
162	63	63	59.3	56.1												
168	56.4	56.4	53.1	50.2												

Non-Impact

Unit Height	Unit Width															
	42	45	48	51	54	57	60	63	66	69	72	75	78	81	84	90
90	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
92	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
96	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
100	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
102	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
104	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
108	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
112	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
114	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
116	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
120	120	120	120	120	120	120	120	109.1	109.1	100	100	92.3	92.3	85.7	85.7	80
124	120	120	120	112	112	102.7	102.7	95.2	95.2	89.2	89.2	84.4	84.4	80.5	80.5	77.3
126	120	120	120	112	112	102.7	102.7	95.2	95.2	89.2	89.2	84.4	84.4	80.5	80.5	77.3
128	120	107.3	107.3	96.8	96.8	88.5	88.5	82	82	76.7	76.7	72.3	72.3	68.8	68.8	65.9
132	120	107.3	107.3	96.8	96.8	88.5	88.5	82	82	76.7	76.7	72.3	72.3	68.8	68.8	65.9
136	105.6	93.5	93.5	84.2	84.2	76.9	76.9	71.1	71.1	66.4	66.4	62.5	62.5	59.3	59.3	
138	105.6	93.5	93.5	84.2	84.2	76.9	76.9	71.1	71.1	66.4	66.4	62.5	62.5	59.3	59.3	
140	92.7	81.9	81.9	73.7	73.7	70	70	63.6	63.6	58.3	58.3	54.5	54.5	51.5	51.5	
144	92.7	81.9	81.9	73.7	73.7	70	70	63.6	63.6	58.3	58.3	54.5	54.5	51.5	51.5	
150	81.8	72.2	72.2	67.6	67.6	61.6	61.6	56.8	56.8	52.8	52.8	49.6	49.6			
156	72.5	66.6	66.6	59.8	59.8	54.5	54.5	50.2	50.2	46.6	46.6	43.7	43.7			
162	67.2	59.3	59.3	53.2	53.2	48.4	48.4	44.6	44.6	41.4	41.4					
168	60.2	53.1	53.1	47.6	47.6	43.3	43.3	39.8	39.8	36.9	36.9					
174	54.1	47.7	47.7	42.7	42.7	38.8	38.8									
180	48.8	43	43	38.5	38.5	34.9	34.9									



DESIGN PRESSURE CHARTS

DESIGN PRESSURE TABLE (+/-PSF) - ALTERNATE INTERLOCK (C/7)										
PANEL HEIGHT WIDTH (INCHES)	TRIBUTARTY WIDTH (INCHES)									
	42	48	54	60	66	72	78	84	90	96
	90	120.0	115.0	105.1	97.7	92.2	88.2	85.4	83.8	80.0
	96	111.7	99.8	90.9	84.1	79.0	75.1	72.2	70.2	68.6
	102	98.1	87.5	79.4	73.3	68.5	64.8	61.9	59.8	57.5
	108	87.0	77.4	70.1	64.4	60.0	56.6	53.8	51.7	49.1
	114	77.6	68.9	62.3	57.2	53.1	49.9	47.3	45.3	42.5
	120	69.8	61.8	55.8	51.1	47.3	44.3	41.9	40.0	38.4
	126	63.0	55.8	50.3	46.0	42.5	39.7	37.5	35.6	34.1
	132	57.2	50.6	45.5	41.6	38.4	35.8	33.7	32.0	30.5
	138	52.2	46.1	41.5	37.8	34.8	32.5	30.5	28.9	
	144	47.8	42.2	37.9	34.5	31.8	29.6	27.7	26.2	
	150	44.0	38.8	34.8	31.7	29.1	27.1	25.3		
	156	40.6	35.8	32.1	29.1	26.8	24.9	23.3		
	162	37.6	33.1	29.6	26.9	24.7	22.9			
	168	34.9	30.7	27.5	25.0	22.9	21.2			
	174	32.5	28.6	25.6	23.2					
	180	30.3	26.6	23.8	21.6					

NEED *extra* SUPPORT

Do you have questions about Vista Multi Slide™ and how it can make an impact in your space? Our FOR YOU Crew™ is always ready with friendly, one-on-one support.





euro-wall.com



American
CRAFTSMANSHIP

MANUFACTURING & SHOWROOM

2200 Murphy Ct.
North Port, FL 34289
888.989.EURO (3876)

SHOWROOM

1211 Stirling Rd., Unit 102,
Dania Beach, FL 33004
941.979.5316

EURO-WALL UNLOCKS *breathtaking perspectives*
THROUGH THE *largest, strongest* DOOR SYSTEMS
WITH THE MOST DESIGN OPTIONS – ALL BACKED
BY *enjoyable, personal* SUPPORT – FOR A *superior*
experience FROM OPEN TO CLOSE.



© 2024 Euro-Wall, LLC. Unless Otherwise
noted, all proprietary names are trademarks
of Euro-Wall. All rights reserved.

