















Proven & Protective






Enhance your space by folding together aesthetics and functionality. Vista Fold™ is an innovative folding door system that's outside the box. Enjoy uninterrupted vistas and effortless transitions to the outdoors, coupled with either impact or non-impact ratings. Its ingenious folding mechanism maximizes space, seamlessly blending indoor and outdoor living areas. Crafted with sleek aluminum frames for durability and longevity, these doors epitomize contemporary design.

At Euro-Wall, everything we do is Superior by Design. We constantly push ourselves to provide the highest quality doors with the largest views to give you the freedom to design without limitations.





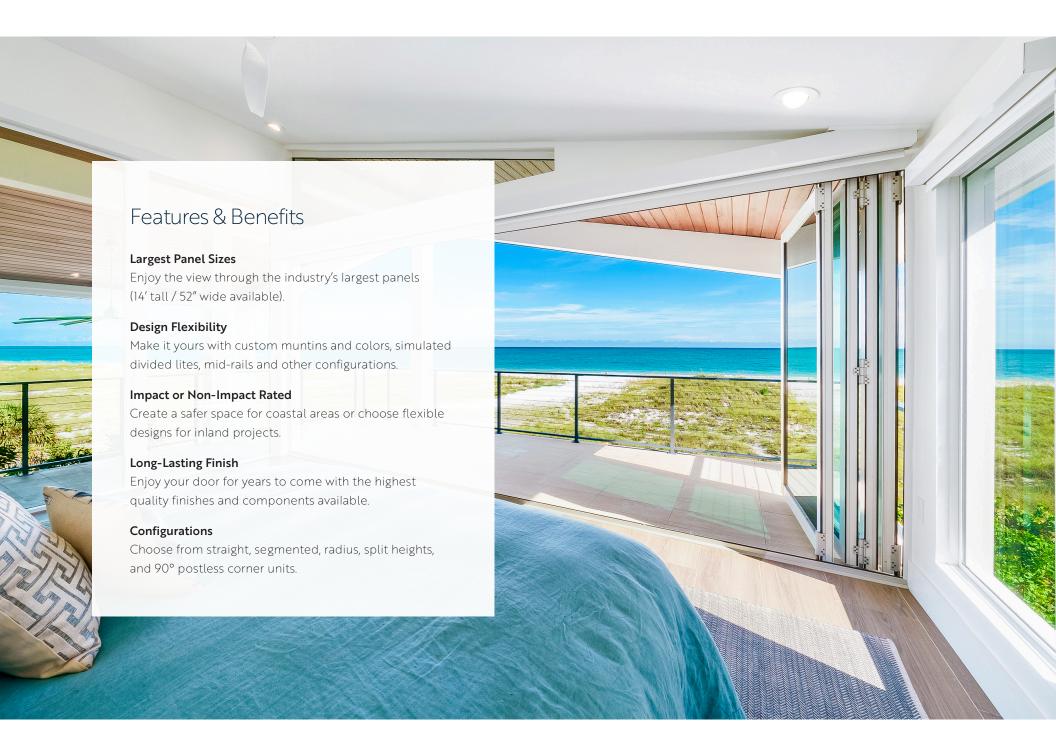

System Thresholds

MAXIMUM / MINIMUM SPECIFICATIONS

	IMPACT RATED	NON-IMPACT RATED
MAX. PANEL WEIGHT	350 lbs	350 lbs
MAX. PANEL HEIGHT	168"	180"
MAX. PANEL WIDTH	52"	52"
MIN. PANEL HEIGHT	20"	20"
MIN. PANEL WIDTH	20"	20"
PANEL THICKNESS	2-1/4"	2-1/4"
MAX OPENING	334 SQ. FT	415 SQ. FT

Note: When using maximum panel widths & heights, panels may exceed maximum panel weight of 350 lbs. Calculated weight check should be done. For installations in Florida, please see the Florida Product Approval (#17838) for usage and limitations.



10-Year Limited Warranty

Euro-Wall warrants the products to be free from manufacturing defects for a period of 10 years.











Sill Options



STANDARD SILL

Water-Rated, Impact-Rated | E0037



ADA SILL Impact-Rated | E0028



MODIFIED STANDARD SILL

Impact-Rated | E0034



CHANNEL SILL
Interior Application Only | E0108

Finish Options

STANDARD FRAME & DOOR PANEL FINISHES











UC40577

Sunstorm Arcadia Silver UC70123F

Bronze UC91252

Black UC40577

Clear Anodized

Standard finish is Kynar AAMA 2605.

FRAME & DOOR PANEL FINISHES

- · Kynar® Liquid Paint or Powder Coat finishes available
- · Custom powder coat or Kynar® finishes available
- · Custom faux woodgrain finishes available

INTERIOR WOOD CLAD FINISH OPTION

- Mahogany / sapele
- · White oak
- · Additional wood species available



Hardware / Handle Finish Options

Custom handle options available

MULTIPOINT LOCK HANDLE



Polished Stainless Steel Brushed Satin Bronze Black

TWINPOINT LEVER



Sunstorm Arcadia Silver White Brushed Satin Bronze Black Custom Colors Available

HINGES / HARDWARE




White Brushed Satin Black / Dark Bronze

Note: The colors shown are an approximation of actual colors and finishes. Actual finishes may vary slightly.






Standard Configurations

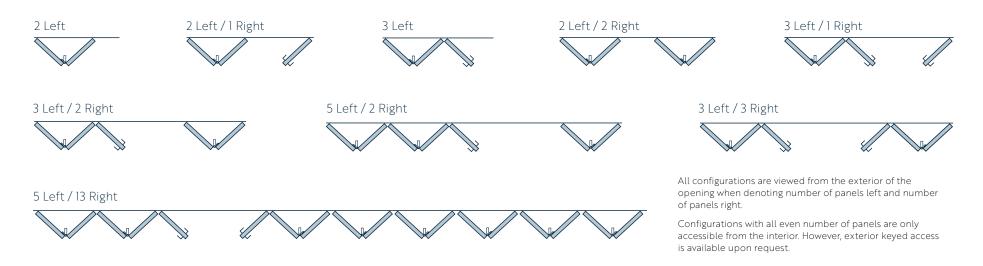

Specialty Configurations

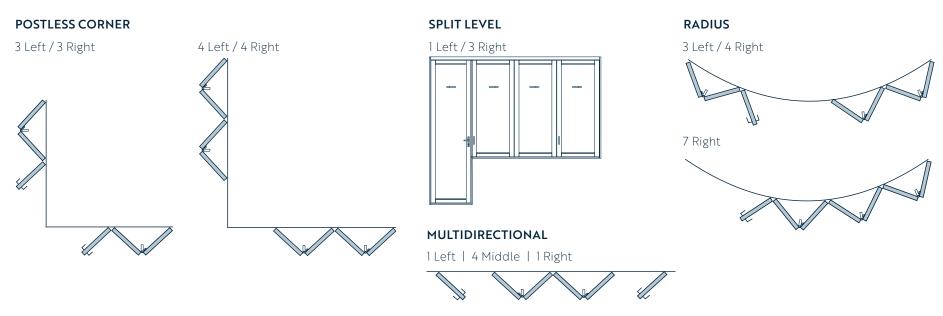



Double Egress Capabilities

Flexible daily door access.

Multi-Directional Movement

Unmatched flexibility.

Effortless Operation

Smooth-glide precision.

Enhanced Security


Engineered peace of mind.

Freedom to Move, Power to Perform.

Take your design freedom to the next level with Euro-Wall's Multidirectional Folding Doors—an advanced evolution of our proven aluminum folding door system. This innovative update allows pairs of panels to fold and slide in any direction creating truly flexible configuration options and egress points for opening transitions.


*Double egress condition shown


1 Left | 2 Middle | 1 Right



4 Left / Middle | 1 Right












Panel Cross Section outswing configuration shown

Standard Sill Shown Header: E0032

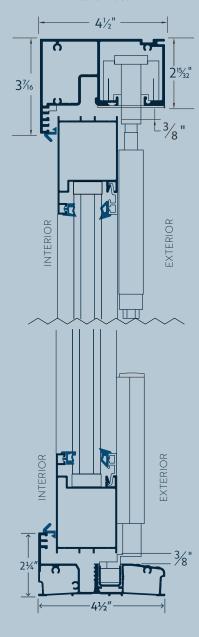




Glazing Details

OVERALL GLASS THICKNESS 1/4" | 3/8" | 1/2" | 9/16" | 1"


We can handle most any type of glass if it meets the required thickness. Let's talk.

9/16" LAMINATED GLASS - IMPACT RATED

Stile Recessed: E0036 Active (not shown): E0027




Top Bottom Rail




1" INSULATED GLASS - IMPACT RATED

Stile Recessed: E0036 Active (not shown): E0027



Top Bottom Rail



DESIGN PRESSURE CHARTS

HVHZ & Wind Zone 3

Panel Width

		20	24	28	32	36	40	44	48	52		
	72	65	65	65	65	65	65	65	65	65		
	78	65	65	65	65	65	65	65	65	65		
	84	65	65	65	65	65	65	65	65	65		
	90	65	65	65	65	65	65	65	65	65		
	96	65	65	65	65	65	65	65	65	65		
	102	65	65	65	65	65	65	65	65			
9	108	65	65	65	65	65	65	65	65		— HVHZ	
2	114	65	65	65	65	65	65	65				
;	120	65	65	65	65	65	65					
3	126	65	65	65	65	65	65					
	132	65	65	65	65	65						
	138	65	65	65	65	65						
	144	65	65	65	65	65	-					
	150	65	65	65	65	<u> </u>						
	156	65	65	64.9	64.3	Lwin	ID ZONE 3					
	162	65	65	57.9	57	WIIN	D ZOINE 3					
	168	65	60.4	51.9	50.9							

Non-Impact

Panel Width

	20	24	28	32	36	40	44	48	52
72	100	100	100	100	100	97.5	88.6	81.3	75
78	100	100	100	100	100	97.5	88.6	81.3	75
84	100	100	100	100	100	97.5	88.6	81.3	75
90	100	100	100	100	100	97.5	88.6	81.3	75
96	100	100	100	100	100	97.5	88.6	81.3	75
102	100	100	100	98.7	88.6	80.7	74.4	69.2	64.9
108	100	100	93.8	82.8	75	68.1	65	59.6	55
114	100	92.2	79.5	75	75	68.1	65	59.6	55
120	94.2	78.9	75	75	68.1	63.5	58.3	54	50.4
126	81.3	75	74.4	65.5	65	58.5	53.2	48.8	45
132	75	75	65	65	65	58.5	53.2	48.8	
138	75	65.6	65	65	65	58.5	53.2	48.8	
144	69	65	65	65	58.5				
150	65	65	65	64.3	57.4				
156	65	65	64.9	57	50.9				
162	65	65	57.9	50.9					
168	65	60.4	51.9	45.6					
174	65	54.3	46.7						
180	58.7	49	42.1						
	78 84 90 96 102 108 114 120 126 132 138 144 150 156 162 168 174	72 100 78 100 84 100 90 100 96 100 102 100 108 100 114 100 120 94.2 126 81.3 132 75 138 75 144 69 150 65 156 65 162 65 168 65 174 65	72 100 100 78 100 100 84 100 100 90 100 100 96 100 100 102 100 100 108 100 100 114 100 92.2 120 94.2 78.9 126 81.3 75 132 75 75 138 75 65.6 144 69 65 150 65 65 156 65 65 162 65 65 168 65 60.4 174 65 54.3	72 100 100 100 78 100 100 100 84 100 100 100 90 100 100 100 96 100 100 100 102 100 100 100 108 100 100 93.8 114 100 92.2 79.5 120 94.2 78.9 75 126 81.3 75 74.4 132 75 75 65 138 75 65.6 65 144 69 65 65 65 150 65 65 65 65 156 65 65 65 64.9 162 65 65 65 57.9 168 65 60.4 51.9 174 65 54.3 46.7	72 100 100 100 100 78 100 100 100 100 100 84 100 100 100 100 100 90 100 100 100 100 100 96 100 100 100 100 98.7 102 100 100 93.8 82.8 114 100 92.2 79.5 75 120 94.2 78.9 75 75 126 81.3 75 74.4 65.5 132 75 75 65 65 133 75 65.6 65 65 144 69 65 65 65 65 150 65 65 65 64.3 156 65 64.9 57 162 65 65 65 57.9 50.9 168 65 60.4 51.9 45.6 <	72 100 100 100 100 100 78 100 100 100 100 100 100 84 100 100 100 100 100 100 90 100 100 100 100 100 100 96 100 100 100 100 100 100 100 102 100 100 100 98.7 88.6 100 100 93.8 82.8 75 114 100 92.2 79.5 75 75 68.1 120 94.2 78.9 75 75 68.1 126 81.3 75 74.4 65.5 65 132 75 75 65 65 65 65 133 75 65.6 65 65 65 65 144 69 65 65 65 58.5 150 65	72 100 100 100 100 100 97.5 78 100 100 100 100 100 97.5 84 100 100 100 100 100 97.5 90 100 100 100 100 100 97.5 96 100 100 100 100 100 97.5 96 100 100 100 100 100 97.5 90 100 100 100 100 100 97.5 96 100 100 100 100 100 97.5 90 100 100 100 98.7 88.6 80.7 102 100 100 93.8 82.8 75 68.1 114 100 92.2 79.5 75 75 68.1 120 94.2 78.9 75 75 68.1 63.5 126 81.	72 100 100 100 100 100 97.5 88.6 78 100 100 100 100 100 97.5 88.6 84 100 100 100 100 100 97.5 88.6 90 100 100 100 100 97.5 88.6 96 100 100 100 100 97.5 88.6 96 100 100 100 100 97.5 88.6 97 75 78.8 86.8 80.7 74.4 108 100 100 93.8 82.8 75 68.1 65 114 100 92.2 79.5 75 75 68.1 65 120 94.2 78.9 75 75 68.1 63.5 58.3 120 94.2 78.9 75 75 68.1 63.5 58.3 122 81.3 75	72 100 100 100 100 100 97.5 88.6 81.3 78 100 100 100 100 100 97.5 88.6 81.3 84 100 100 100 100 100 97.5 88.6 81.3 90 100 100 100 100 97.5 88.6 81.3 96 100 100 100 100 97.5 88.6 81.3 96 100 100 100 100 97.5 88.6 81.3 96 100 100 100 100 97.5 88.6 81.3 96 100 100 100 90.0 75.5 88.6 81.3 102 100 100 93.8 82.8 75 68.1 65 59.6 114 100 92.2 79.5 75 75 68.1 65 59.6 120 94.2



Test Performance

IMPACT

Air Infiltration: ASTM E283-04 Water Infiltration: ASTM E331-00 Wind Load: TAS 202-94 Large Missile Impact: TAS 201-94

Cyclic Load: TAS 203-94
Forced Entry: ASTM F842-14







#17838









euro-wall.com

f h X @ P in



MANUFACTURING & SHOWROOM

2200 Murphy Ct. North Port, FL 34289 888.989.EURO (3876)

SHOWROOM

1211 Stirling Rd., Unit 102, Dania Beach, FL 33004 941.979.5316 EURO-WALL UNLOCKS breathtaking perspectives
THROUGH THE largest, strongest DOOR SYSTEMS
WITH THE MOST DESIGN OPTIONS – ALL BACKED
BY enjoyable, personal SUPPORT – FOR A superior
experience FROM OPEN TO CLOSE.

vision BLOCKED?

If you have questions about
Vista Fold™, our FOR YOU
Crew™ is always ready to
clear things up with friendly,
one-on-one support.





